

BH127A 1.27mm BOX HEADER, SMT TYPE


Allconnectors

Pitch: 1.27mm x 1.27mm





www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40 ° C to +105° C
 Max Processing Temp: 230 ° C for 30 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard : NYLON-9T

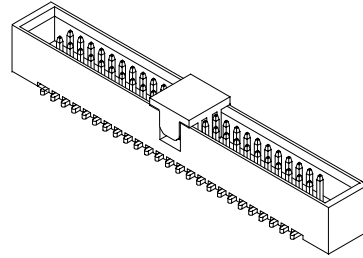

RoHS compliant

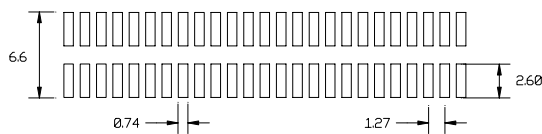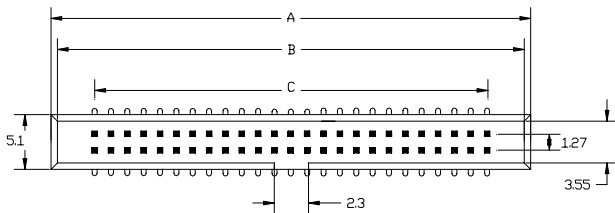

Position	A	B	C
10	12.65	11.10	5.08
12	13.92	12.37	6.35
14	15.19	13.64	7.62
16	16.46	14.91	8.89
20	19.00	17.45	11.43
24	21.54	19.99	13.97
26	22.81	21.26	15.24
30	25.35	23.80	17.78
34	27.89	26.34	20.32
40	31.70	30.15	24.13
44	34.24	32.69	26.67
50	38.05	36.50	30.48

RECOMMENDED P.C.B LAYOUT

HOW TO ORDER

BH127A- - - -

NO. OF CONTACT
 10 12 14 16 20
 24 26 30 34 40
 44 50

CONTACT PLATING
 H : Gold Flash/Tin
 I : 5u" Gold/Tin
 J : 10u" Gold /Tin
 K : 15u" Gold/Tin
 L : 30u" Gold/Tin
 © Standard: H

SPECIAL FUNCTION
 Ø:W/O LOCATING PEG

CODE PACKING
 A: Tube
 B: Pad+Tube
 C: Tape & Reel
 © Standard: A