
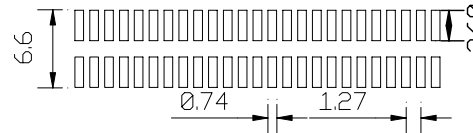
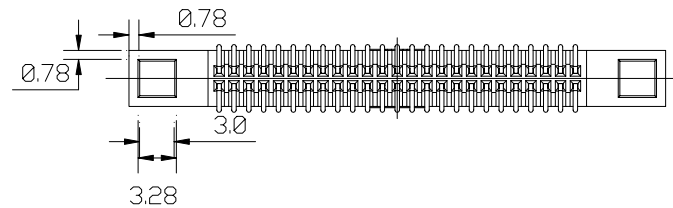

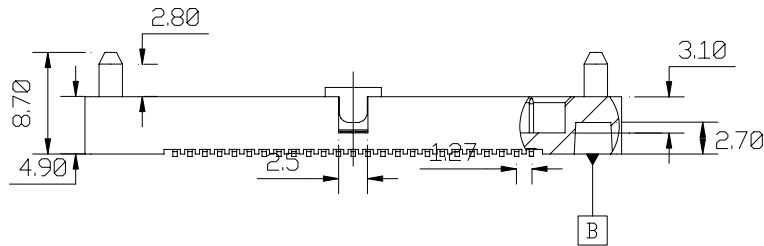
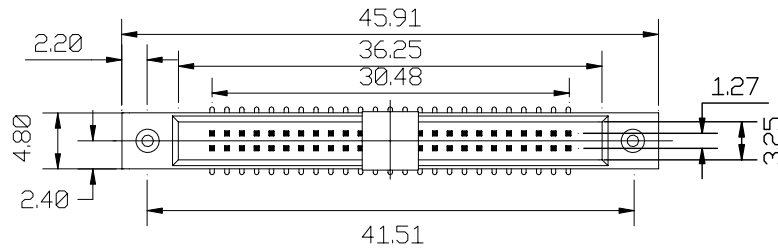


RoHS compliant

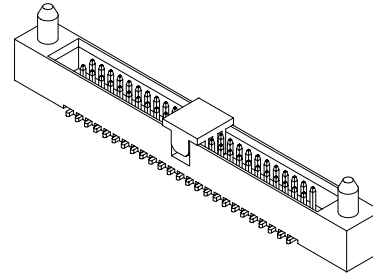

RECOMMENDED P.C.B LAYOUT

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer

Processing

Max Processing Temp: 260 ° C for 6 seconds
 SMT Lead Coplanarity: $\langle 0.10\text{mm} \rangle .004'' \text{max} \langle 10-50 \rangle$

Ordering Code:

BH127- 50 - A - X
 ① ② ③ ④

- ① Series No:
- ② No. of Contact
50
- ③ Contact Plating
A: Gold Flash
- ④ Code Packing
A: Tube
B: Pad+Tube
C: Pad+Reel

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	
0	
.0	±0.25
.00	±0.2
SCALE:	UNIT:
AS SHOWN	mm

Allconnectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN	TITLE: 1.27 mm Box Header SMT Type
CHECKED	
APPROVED	DRAWN NO: BH127-XXX-1
REV	PRODUCT NO. BH127-XXX

REV	DESCRIPTION	DATE
-----	-------------	------