


## 2.00mm PITCH BOX HEADER CONNECTOR, SHROUDED TERMINAL STRIP, DOUBLE ROW, VERTICAL, SMT, ROHS COMPLIANT

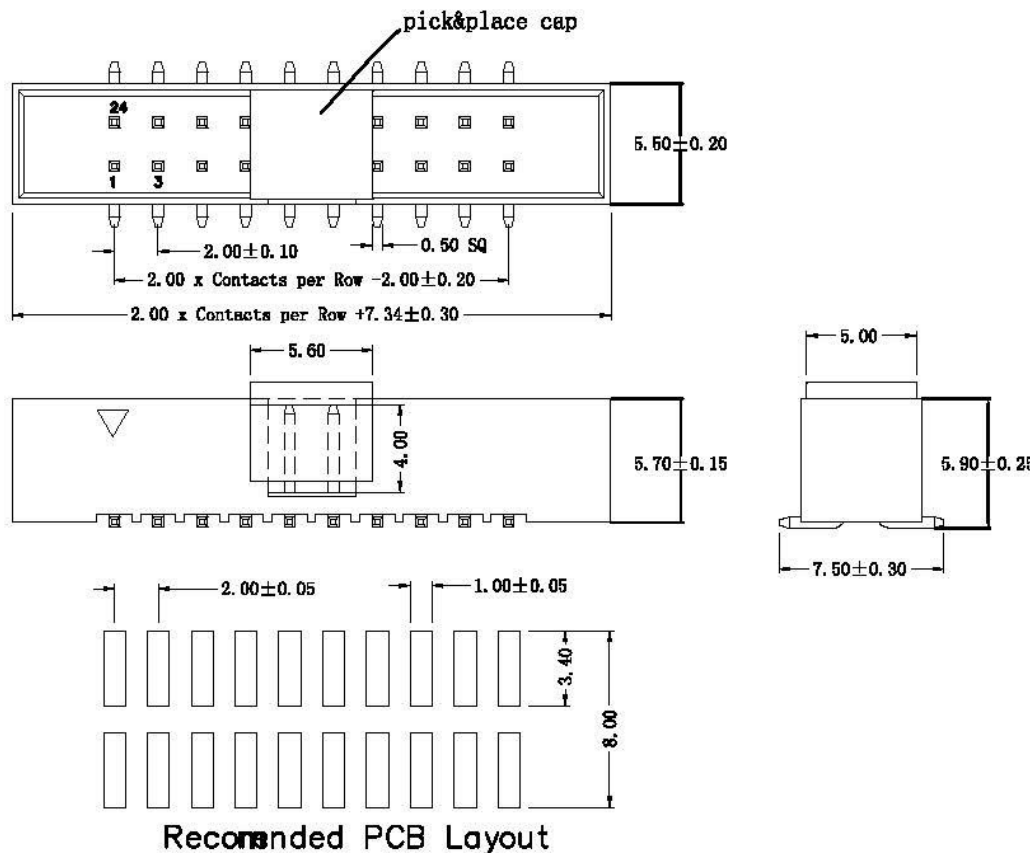

### Material Information:

Terminal: Phosphor bronze  
 Insulator: PA6T+30%G. F, UL94V-0  
 Plating: Au or Sn plated over 50 U" Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 2.0A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

### Ordering Information

BBM57 - XX XX XX B2 X  
 ① ② ③

- ① No. of Contacts Per Row: 06 To 64
- ② Plating Option:  
 01: Gold Flash Over All  
 3S: 30U" Gold On Contact & Tin On Tail  
 FS: Gold Flash On Contact & Tin On Tail  
 OS: Tin Plated Over All
- ③ Packing Option:  
 B: PE Bag      D: Reel  
 C: Tube        E: Reel with Cap



www.allconnectors.de  
 Tel.: 0519 711 700603  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0519 711 700604  
 Kette nr. st.: 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)		料号 (PART NO)	BBM57-XXXXXXB2X
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30		品名 (NAME)	2.00间距筒牛 双排 SMD
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.20			
		版本 (EDITION)	A				
		日期 (DATE)	2013/12/14				