
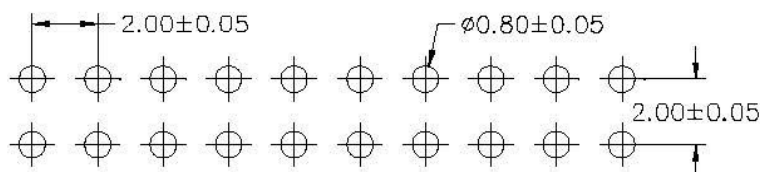
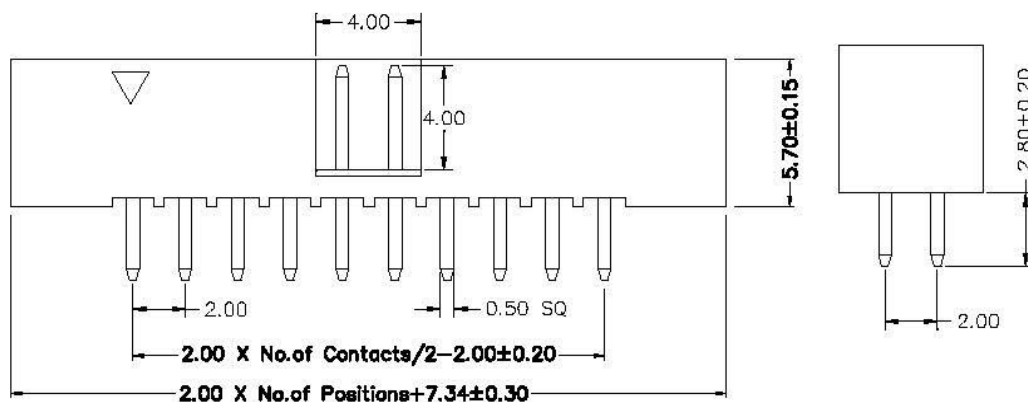


## 2.00mm PITCH BOX HEADER, SHROUDED TERMINAL STRIP STRAIGHT, DOUBLE ROW, ROHS COMPLIANT

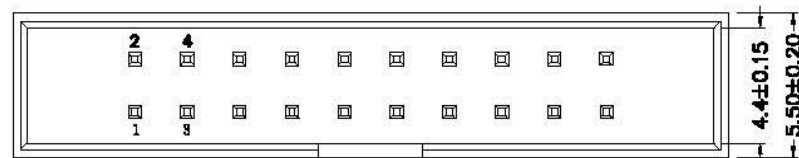

Recommended PCB Layout

### Material Information:

Terminal: Brass  
 Insulator: PA6T+30%G.F (UL94V-0)  
 Plating: Au or Sn plated over 50 U<sup>o</sup> Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 2.0A  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000mΩ Min.  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

### Ordering Information

BBS57 - XX XX XX B1 X  
 ①            ②            ③

- ① No. of Contacts: 6 To 68
- ② Plating Option:  
 01: Gold Flash Over All  
 03: 3U<sup>o</sup> Gold plated Over All  
 05: 5U<sup>o</sup> Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray    B: PE Bag  
 C: Tube            D: Reel

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)	BBS57-XXXXXXB1X	
	审核 (CHECKED)	刘思晴	单位 (UNIT)				MM
	核准 (APPROVE)		比例 (SCALE)				1:1
		版本 (EDITION)	A	0.0 ± 0.30	品名 (NAME)	2.00间距筒牛 双排 180°	
		日期 (DATE)	2013/12/14	0.00 ± 0.15			