


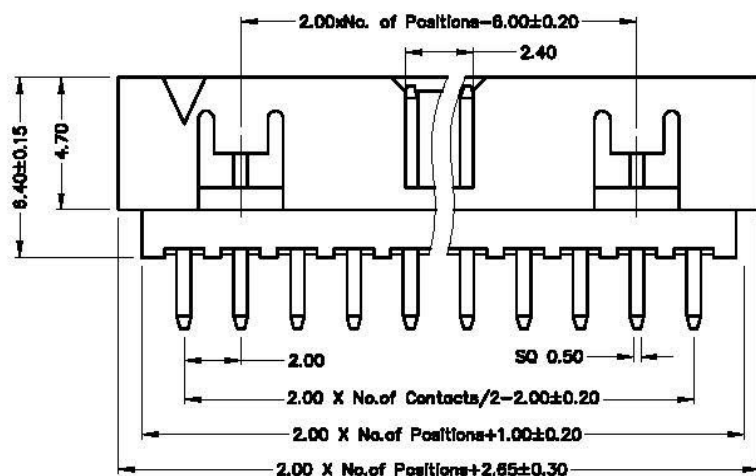


## 2.00mm PITCH BOX HEADER, SHROUDED TERMINAL STRIP STRAIGHT, DOUBLE ROW, ROHS COMPLIANT

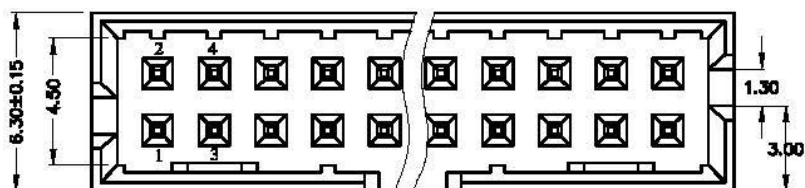

Recommended P.C.B Layout

### Material Information:

Terminal: Brass  
 Insulator: PA6T+30%G.F (UL94V-0)  
 Plating: Au or Sn plated over 50 U" Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 2.0A  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000mΩ Min.  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

### Ordering Information

BBS64 - XX XX XX B1 X  
 ①            ②            ③

- ① No. of Contacts: 10 To 80
- ② Plating Option:  
 01: Gold Flash Over All  
 03: 3U" Gold plated Over All  
 05: 5U" Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray    B: PE Bag  
 C: Tube            D: Reel



www.allconnectors.de    info@allconnectors.de  
 Tel: 0049 711 400340    Fax: 0049 711 400341  
 70794 Filderstadt, Germany    Kollernstraße, 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)	MM	公差 (TOLERANCE)	料号 (PART NO)	BBS64-XXXXXXB1X
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30	品名 (NAME)	
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.15		
		版本 (EDITION)	A			2.00间距筒牛 双排 180°
		日期 (DATE)	2013/12/14			