
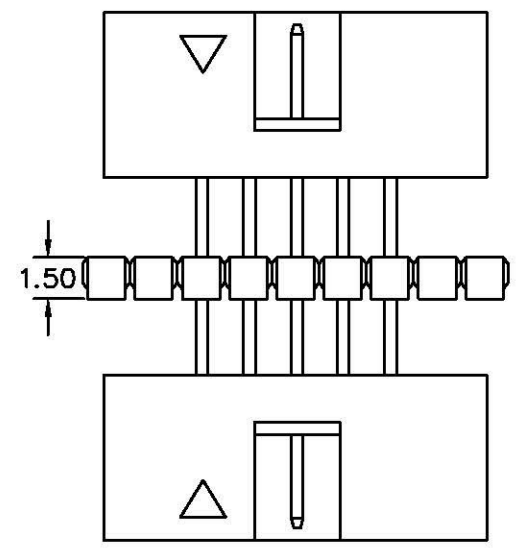


MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 DIELECTRIC STRENGTH : 1000 VAC MIN
 DURABILITY : 100 CYCLES
 RETENTION FORCE : 700g MIN

FINISH
 CONTACT PLATING SEE ORDER INFORMATION

MBX2-MB134-2X05-LF
 LEADFREE
 RoHS Compliant

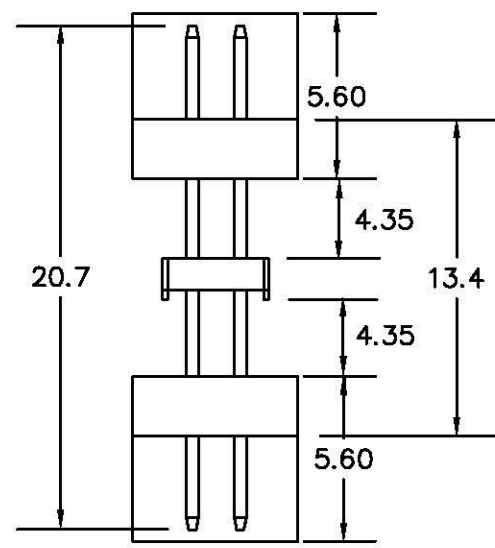

All Connectors

www.allconnectors.de
 info@allconnectors.de
 Tel: 0912 / 31 909200
 70754 Filberstadt - Germany

PART NO. MBX2-MB134-2X05

DWG NO. MBX2-MB134-2X05

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:			
AREA	REVISIONS	HK	DATE

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F

E

D

C

B

A