


## 2.54mm PITCH FEMALE HEADER, DOUBLE ROW, VERTICAL, STRAIGHT THROUGH HOLE, BODY HEIGHT=13.00mm, ROHS COMPLIANT

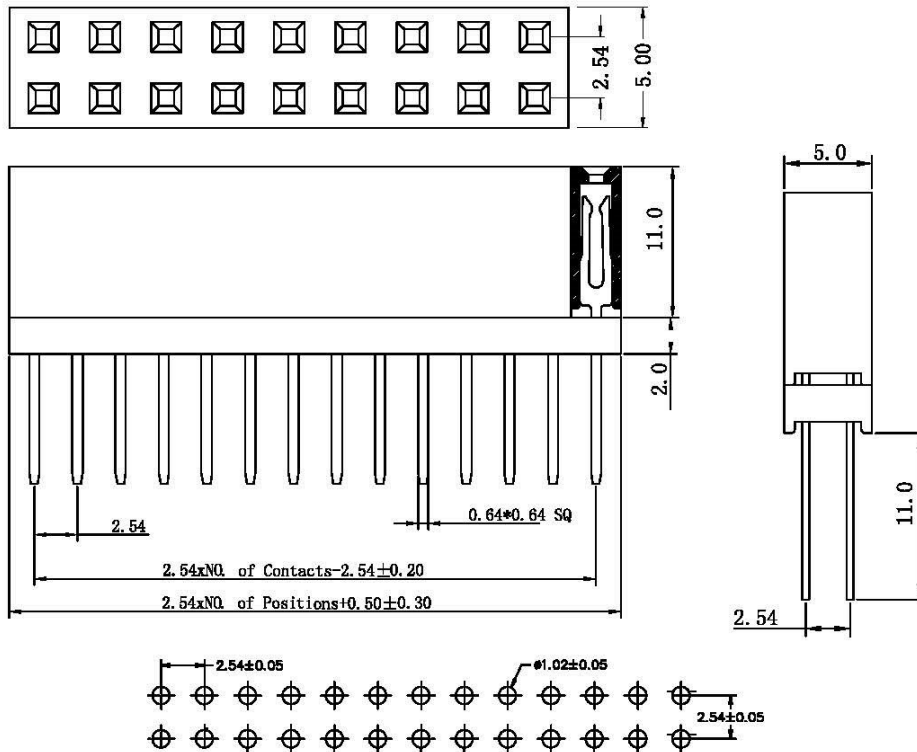

RECOMMENDED PCB LAYOUT

**Material Information:**

Terminal: Brass  
 Insulator: PA6T+30%G.F, UL94V-0  
 Plating: Au or Sn plated over 50 U" Ni  
 All materials compliant with ROHS

**Technical Specifications:**

Current Rating: 3A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -45° C to +105° C

**Ordering Information**

AFSW13 - XX XX XX B1 B  
 ①            ②            ③

- ① No. of Contacts Per Row: 02 To 40
- ② Plating Option:  
 01: Gold Flash Over All  
 3S: 30U" Gold On Contact & Tin On Tail  
 FS: Gold Flash On Contact & Tin On Tail  
 OS: Tin Plated Over All
- ③ Packing Option:  
 B: PE Bag



www.allconnectors.de    info@allconnectors.de  
 TEL: 0049 211 2009503    Fax: 0049 211 2009504  
 70734 Hilderstrich - Germany    gettemerstr. 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ±0.30	
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ±0.20	
		版本 (EDITION)	A		
		日期 (DATE)	2013/12/14		

料号 (PART NO)	AFSW13-XXXXXXB1B
品名 (NAME)	2.54双排母 方针 180度