


Contract:
 Contact: Brass.
 Insulator: PBT.
 Finish: Gold flash plated over nickel.

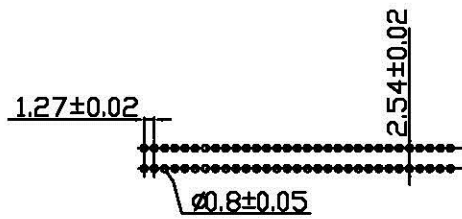

P. C. Board Layout

Circuits	Dimension					
	A	B	C	D	E	F
20	30.95	11.43	29.35	18.75	21.59	48.95
26	34.76	15.24	33.16	22.56	25.40	52.76
30	36.03	17.78	34.43	23.83	26.67	54.03
34	39.84	20.32	38.24	27.64	30.48	57.84
40	43.65	24.13	42.05	31.45	34.29	61.65
50	50.00	30.48	48.40	37.80	40.64	68.00
60	57.25	36.83	54.75	44.15	56.99	74.35
68	61.43	41.91	59.83	49.23	52.07	79.43
80	69.95	49.53	67.45	56.85	59.69	87.05
100	82.65	62.23	80.25	69.55	72.39	99.75

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7905303
 70754 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7905304
 Kettengasse, 25

PART NO. HL-D2-xxx

DWG NO. HL-D2-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

Pitch 1.27-2.54 Fully Latch Header Straight

AREA

REVISIONS

HK

DATE