


Contract:  
Contact: Brass.  
Insulator: Nylon 9T.  
Finish: Gold flash plated over nickel.

ML-D-xxx-LF  
LEADFREE

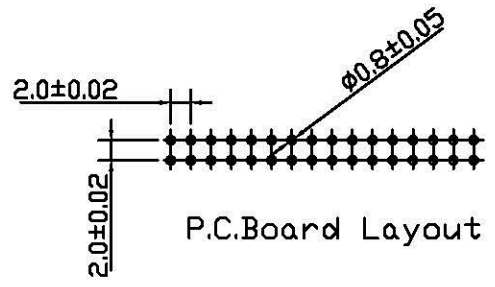

RoHS Compliant

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
10	10.0	25.9	8.0	26	26.0	41.9	24.0
12	12.0	27.9	10.0	30	30.0	45.9	28.0
14	14.0	29.9	12.0	32	32.0	47.9	30.0
16	16.0	31.9	14.0	34	34.0	49.9	32.0
20	20.0	35.9	18.0	40	40.0	55.9	38.0
22	22.0	37.9	22.0	44	44.0	59.9	42.0
24	24.0	39.9	22.0	50	50.0	65.9	48.0

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 700503  
70731 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 700504  
Kettelerstr. 25

PART NO. ML-D-xxx

DWG NO. ML-D-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X±0.2  
.XX±  
XXX±  
AWG

DESCRIPTION: Shrouded Header 2.0 Pitch Dual Row Straight (Short Lever)

AREA	REVISIONS	HK	DATE	
------	-----------	----	------	--