
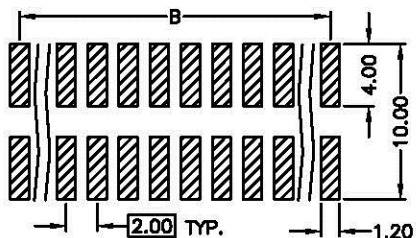
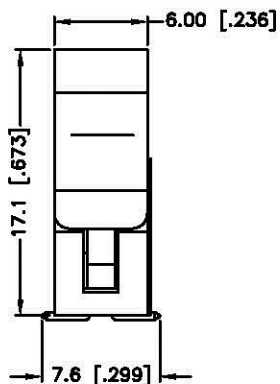
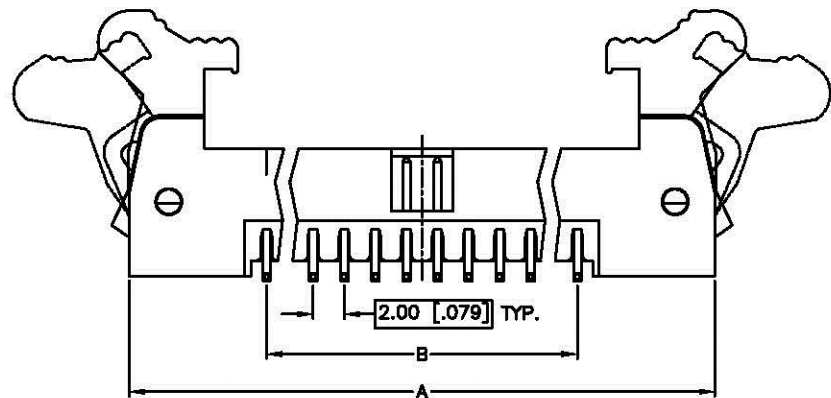


1 2 3 4 5 6 7 8 9 0

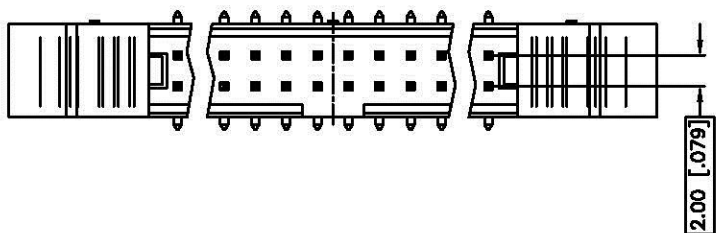

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- 1. HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- 2. TERMINAL : S.Q. 0.50mm COPPER ALLOY.

SPECIFICATION

- 1. CURRENT RATING : 1 AMP. MAX.
- 2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- 3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- 4. OPERATING TEMPERATURE : -40°C TO +85°C.
- 5. MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.

ML-V-xxx-LF
LEADFREE

RoHS Compliant

| NUMBER OF POSITION | DIMENSIONS | | NUMBER OF POSITION | DIMENSIONS | |
|--------------------|--------------|-------------|--------------------|--------------|--------------|
| | A | B | | A | B |
| 10 | 25.70[1.012] | 8.00[.315] | 26 | 41.70[1.642] | 24.00[.945] |
| 12 | 27.70[1.091] | 10.00[.394] | 30 | 45.70[1.799] | 28.00[1.102] |
| 14 | 29.70[1.169] | 12.00[.472] | 34 | 49.70[1.957] | 32.00[1.260] |
| 16 | 31.70[1.248] | 14.00[.551] | 40 | 55.70[2.193] | 38.00[1.496] |
| 20 | 35.70[1.406] | 18.00[.709] | 44 | 59.70[2.350] | 42.00[1.654] |
| 22 | 37.70[1.484] | 20.00[.787] | 50 | 65.70[2.587] | 48.00[1.890] |
| 24 | 39.70[1.563] | 22.00[.866] | 68 | 83.70[3.295] | 66.00[2.598] |

All Connectors

www.allconnectors.de info@allconnectors.de
Tel: 089 211 209-0 Fax: 089 211 209-04
70794 Filderstadt, Germany Kellenmühl, 25

PART NO. ML-V-xxx

DWG NO. ML-V-xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ± 0.3
XX ± 0.2
XXX
AWG

DESCRIPTION:

2.00mm PITCH, P.C.B. MOUNT
SMT, EJECTOR TYPE

AREA

REVISIONS

HK

DATE