

RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Phosphor Bronze
 Insulator Material: Black Liquid Crystal Polymer

Ordering Code:

CPD03- X - X - X
 ① ② ③ ④

① Series No:





② No. of Contact
 26 34 40 50

③ Contact Plating


- A: Gold Flash
- E: 3u" Gold
- B: 10u" Gold
- C: 15u" Gold
- H: Gold Flash/Tin
- I: 5u" Gold/Tin
- J: 10u" Gold /Tin

④ Code Packing

- A: Tube
- B: Tray

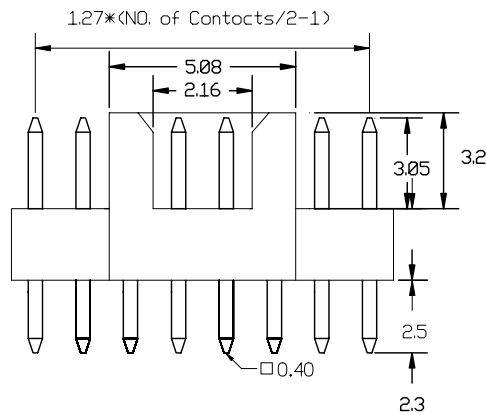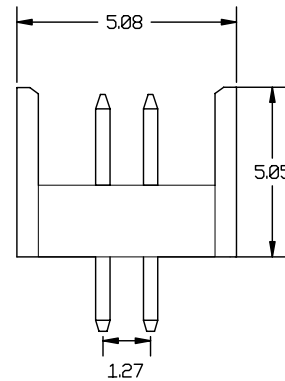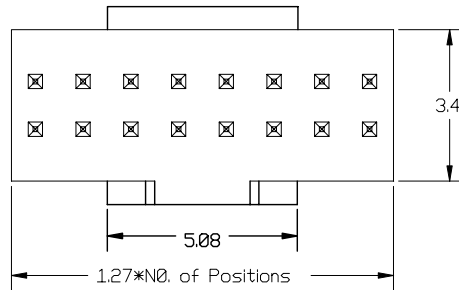

Recommended P.C.Board
 Hole Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN	CHECKED	TITLE: 1.27 mm Box Header, Straight Type
APPROVED	DATE	DRAWN NO: CPD03-XXX-1
REV	DESCRIPTION	PRODUCT NO. CPD03-XXX