

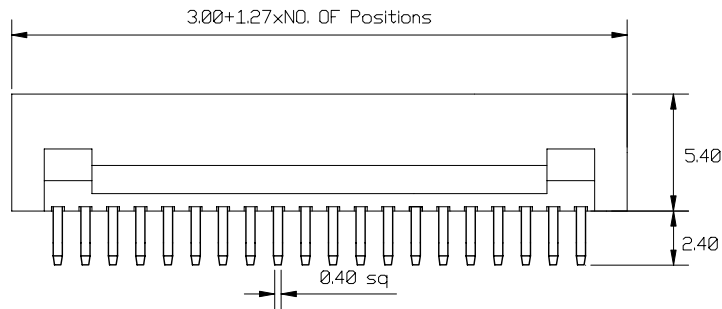



RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: High Temperature Plastic
 UL94V-0

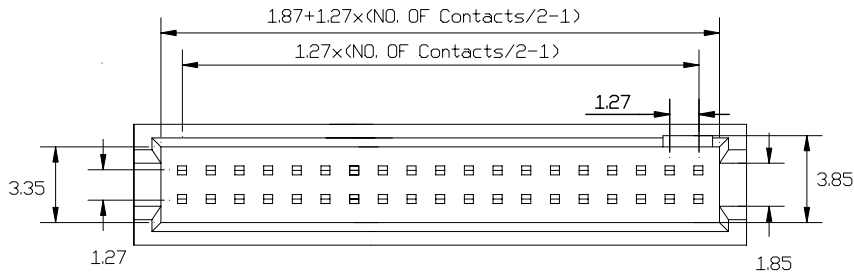

Ordering Code:

CPD04- X - X - X - X
 ① ② ③ ④ ⑤

- ① Series No:
- ② No. of Contact: 06 TO 100
- ③ Connector Type: S: Straight Type, R: Right Angle Type
- ④ Contact Plating: A: Gold Flash, E: 3u" Gold, B: 10u" Gold, C: 15u" Gold
- ⑤ Code Packing: A: Tube, B: Tray

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN		TITLE: 1.27 mm Box Header
CHECKED		
APPROVED		DRAWN NO: CPD05-XXXX-1
REV		PRODUCT NO. CPD05-XXXX
DESCRIPTION		
DATE		