FEATURES:

- 24 pos interface bus connector
- Cable(24) conductors 24AWG 26AWG
- Connector kits available too for assembly fabrication
- Consists of two rack and panel type
- Design includes a Two-Piece Die-Cast metal RF shield enclosing the 24 pos back to back connector

MATERIALS:

- Housing And Cover: thermoplastic P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Shell: Steel nickel plated
- Hood: zinc plated nickel over copper alloy
- Fully EMI/RFI shielded

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

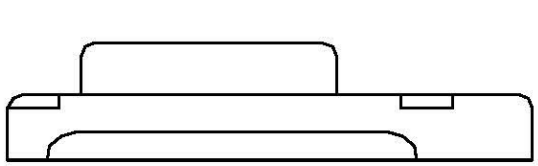

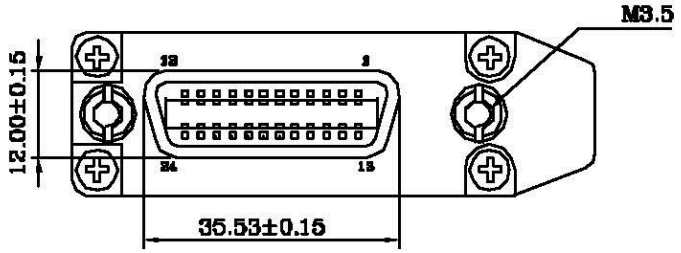



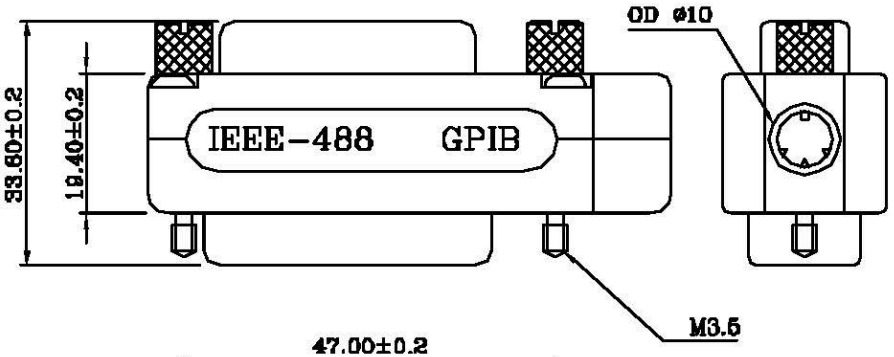





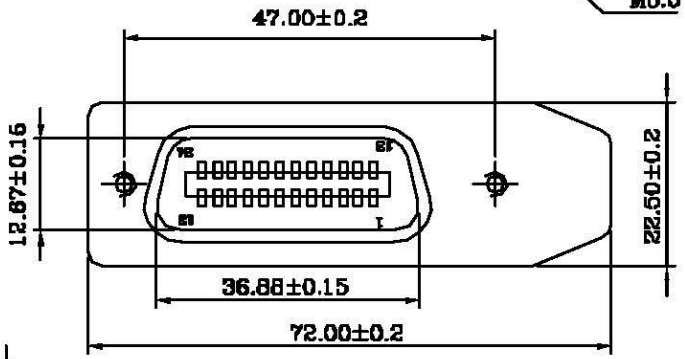

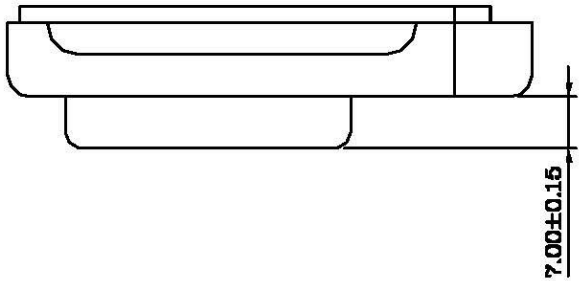

CTA-M-24-LF

METAL

LEADFREE

RoHS Compliant

All Connectors www.allconnectors.de Tel.: 0049 711 7009503 70794 Filderstadt Germany info@allconnectors.de Fax: 0049 711 7009501 Kelterstr. 25	PART NO. CTA-M-24					
	DWG NO. CTA-M-24	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:	Connectors For Interface Bus Applications PER IEEE STD.488 (GPIB) Die-Cast Metal	
	FILE NO.	DRAWING BY				
	UNIT / mm	SCALE 1:1	PROJECTION	AREA	REVISIONS	HK / DATE