
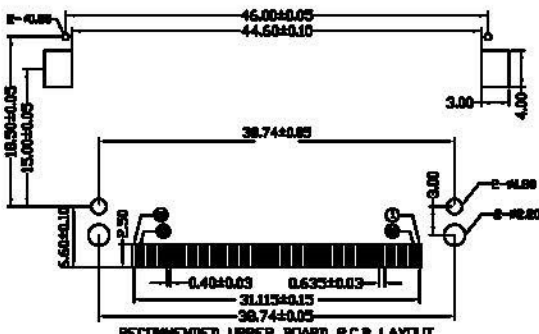

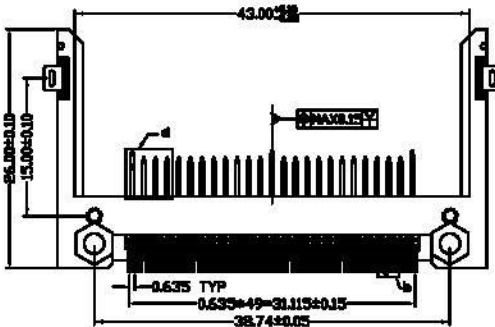
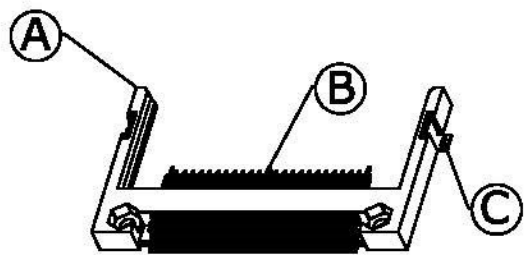


SWITCH CIRCUIT

MATERIAL AND FINISH AS BELOW



WHEN CARD IS EJECTED	WHEN CARD IS INSERTED
----------------------	-----------------------

A	Housing	LCP UL94V-0, Color:Ivory	E
B	Contact	Brass C2680, Gold Plated Over Nickel	F
C	Holddown	Brass C2680, Tin Plated	G
D			H



SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 0.5AMP
 - 1.2 Voltage Rating: 100VAC
 - 1.3 Contact Resistance: 40mΩ
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC for 1 minute
2. MECHANICAL
 - 2.1 Durability: 10000Cycle
 - 2.2 Insertion Force: 28.8N
 - 2.3 Extraction Force: 4.9N
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C to +85°
 - 3.2 Storage temperature range: -40°C to +85°
4. SOLDER ABILITY
 - 4.1 Recommended IR Reflow Temperature: 260°C 10Sec



PIN NUMBER	DIALL
25 26	3.50
ALL OTHER PINS	4.25
1 13 38 50	5.00

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
----	----	----	----	----	----	----	----	----	-----	-----	-----

PIN ASSIGNMENT

101D-TAAB-R01	CF Socket Slim Type Peg:38.74,Contact Area:Gold Flash
---------------	---

PRODUCT NO.	DESCRIPTION	
	UNLESS OTHERWISE SPECIFIED TOLERANCE ANGLES ANG. ±5° LINEAR 0. ±0.3 0.0 ±0.25 0.00 ±0.20 SCALE AS SHOWN UNIT: mm DRAWN Willis 2012/11/13 CHECKED Angel 2012/11/13 APPROVED Ken 2012/11/13	
	www.allconnectors.de info@allconnectors.de Tel: 0049 711 700906 Fax: 0049 711 700904 70794 Filzbergstr. - Germany Kettnerstr. 25	
	DRAWN NAME: CF Slim Type Socket Locating Peg:38.74	
	PRODUCT NO.	101D-TAAB-R01

Revise:											
Revise:											
Revise:											

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1						A4	1.0	101D-TAAB-R01_B_1