


Note

- Material:
 - Contact—Copper Alloy
 - Grounding Plate—Copper Alloy
 - Housing— High Temp Thermoplastic (UL 94V-0)
- Electrical:
 - Current Rating : 0.5A
 - Insulation Resistance : $>1 \times 10^8$ ohm at 500 Vdc
 - $>1 \times 10^8$ ohm at 500 Vdc after Environmental Conditioning
 - Withstanding Voltage : 500 Vrms at Sea Level
- Environmental:
 - Temperature Rating : -10°C to $+70^\circ\text{C}$

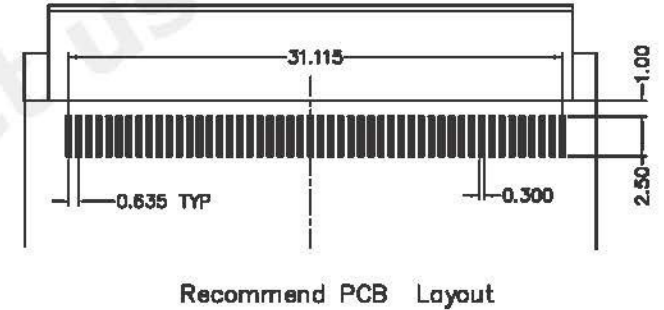

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
	0.	±0.3
LINEAR	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/08/03
CHECKED	Angel	2012/08/03
APPROVED	Ken	2012/08/03

All Connectors	
www.allconnectors.de	info@allconnectors.de
Tel.: 0540 711 700500	Fax: 0540 711 700504
/NVA/ Ulsterstadt - Germany kettemersr. 3	
DRAWN NAME: 50 Pos Female Connector Offset 0.3mm	
PRODUCT NO.	101H-DCBA-R
FILE NAME	101H-DCBA-R_B_1

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		
4			7		
5			8		
6			9		
7			10		

A Revise:
 A Revise:
 A Revise:

SIZE A4 REV. 1.0