
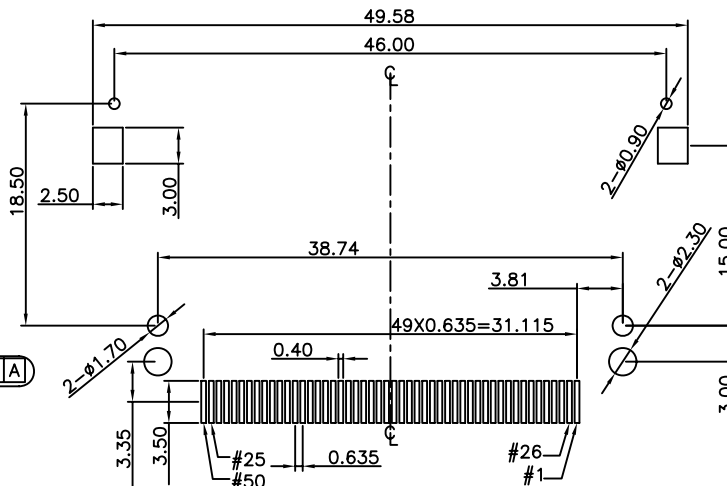
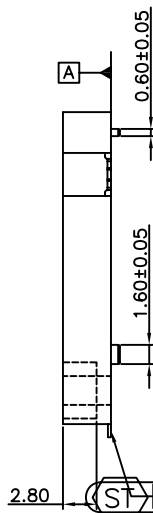


MATERIAL
 Insulator: Thermal Plastic UL94V-0 Color:White
 Contacts: Copper Alloy
 Mount Ear: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 3u" and 15u" Selective Gold
 Solder Tail Area: 100u"~200u" Tin/Lead Free (Matten Tin)
 Contact Number: 50Pin

101D-I X A B-R
 1 2 3 4 5

- | | |
|---------------------------------------------------------------|-----------------------------|
| 1.Type
T:Top Mount | 3.Stand Off
A:0mm |
| 2.Contact Plating
A:15u"Gold Plating
B:3u" Gold Plating | 4.Locating Peg
B:38.74mm |
| | 5.RoHS |

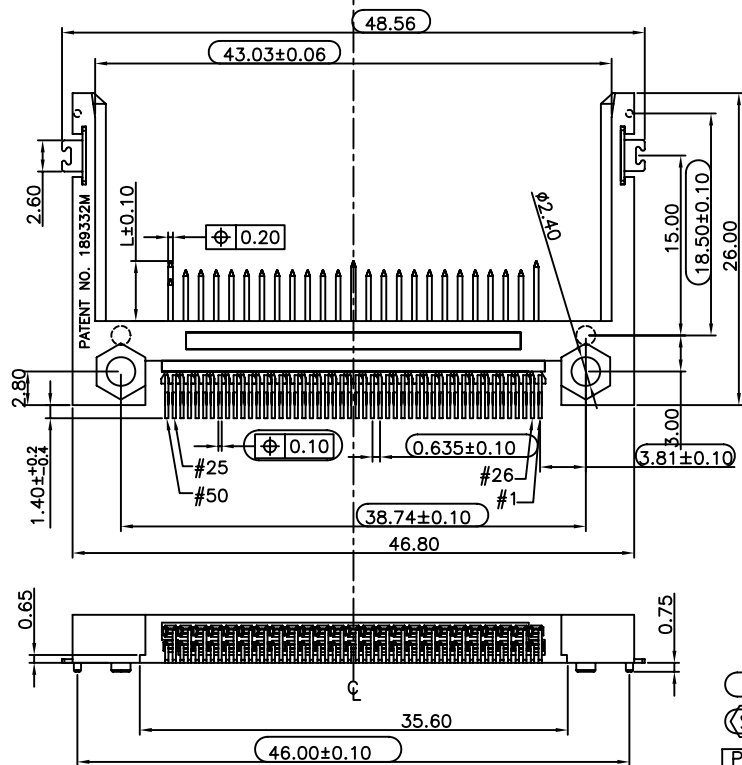

RECOMMENDED P.C.B. LAYOUT
 TOLERANCES: ±0.05mm

For SIP
 For cmk/cpk

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Interface Dim. L	Pin No.

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±5°
 0. ±
 .0 ±0.25
 .00 ±0.20

All Connectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

SCALE: AS SHOWN UNIT: mm
 DRAWN Willis 2009/01/06
 CHECKED / /
 APPROVED / /

DRAWN NAME: CF Socket
 Slim Type Locating Peg=38.74
 PRODUCT NO. 101D-TXAB-R
 FILE NAME: 101D-TXAB-R

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	