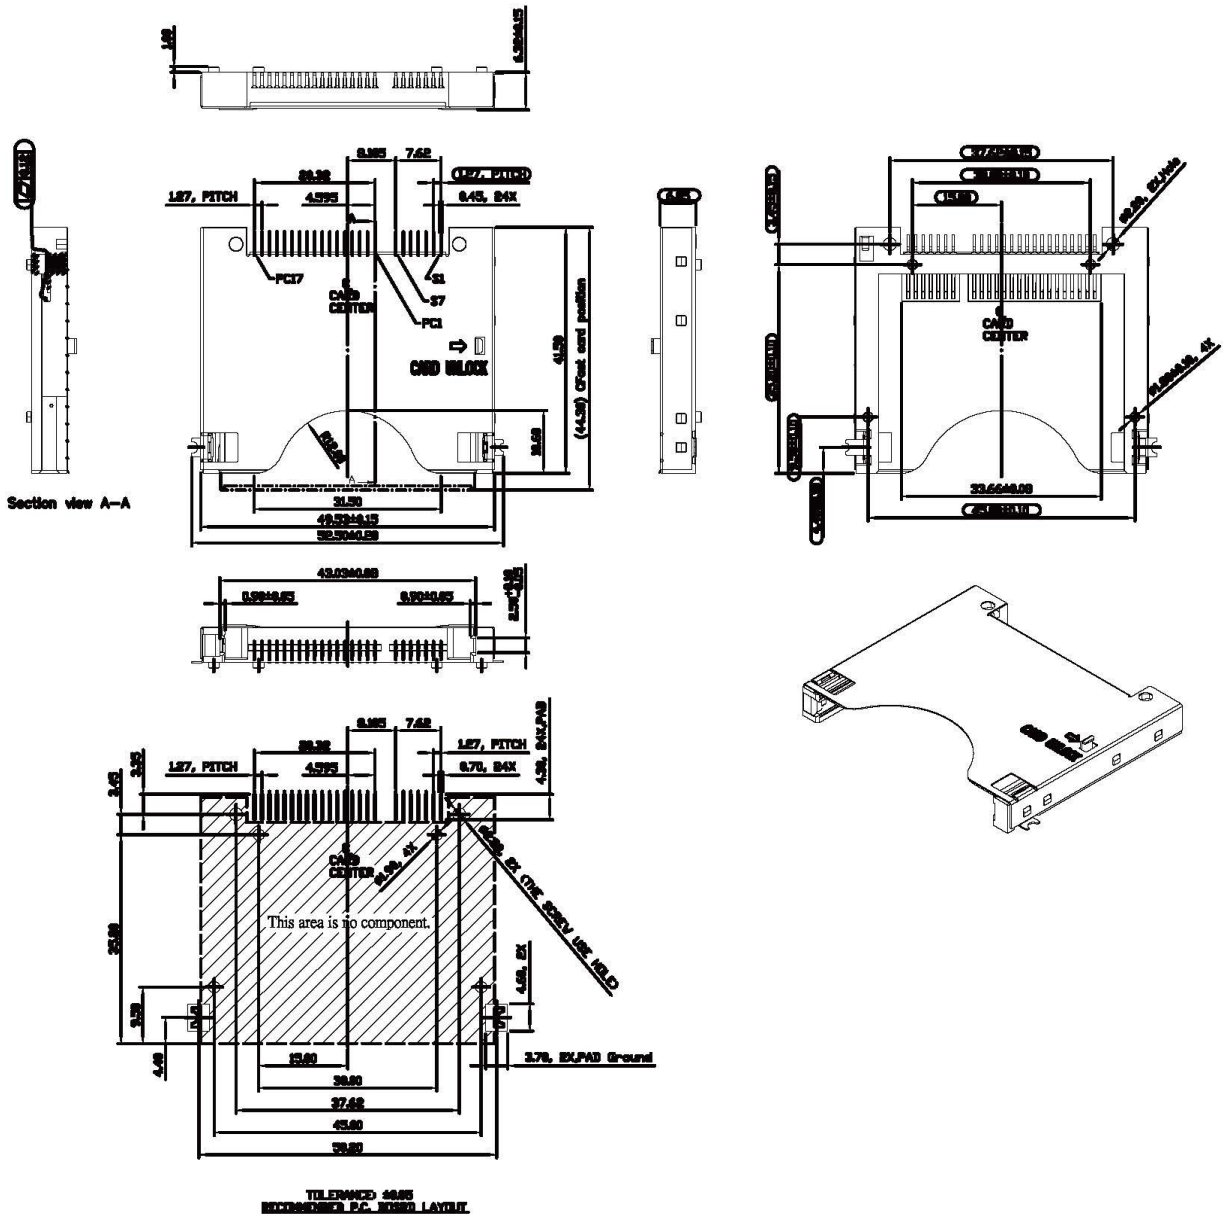

NOTES:

1. MATERIAL:
   - 1-1 Housing： Engineering plastic，LCP with G.F reinforced，black per UL 94V-0 rate.
   - 1-2 Terminal： Phosphor Bronze，per JIS 5210 ，0.2t
   - 1-3 Metal cover：Stainless steel sheet SUS304 0.2t.
2. PLATING:
   Contact area: 0.254 μm (10 μ"minimun) or 0.762 μm (30 μ") gold planting
   Solder zone: 2.54 μm (100 μ") matte Tin 1.27 μm (50 μ") min. Nickel underplating over all.
3. RoHS compliant produsts.
4. OPERATING TEMPERATURE: -40°C~+85°C

1. CONTACT TYPE: Male
2. CONTACT NUMBER: 24
3 .SHELL MATERIAL: Stainless steel 6.05H LOCK
4 .SOLDER TAILS AREA PLATING: TIN

RoHS Compliant

AllConnectors
www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7009504
Kettemerstr. 25

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

CFA-PW30CE201PL-24-HF

SERIES | MALE | 90°SMT | POST TO POST 30.0mm | C TYPE | EAR | NORMAL | TYPE 2 | PUSH LOCK | 24WAY | HALOGEN FREE

DESCRIPTION: CFAST HOST CONNECTOR LOCK TYPE II.