
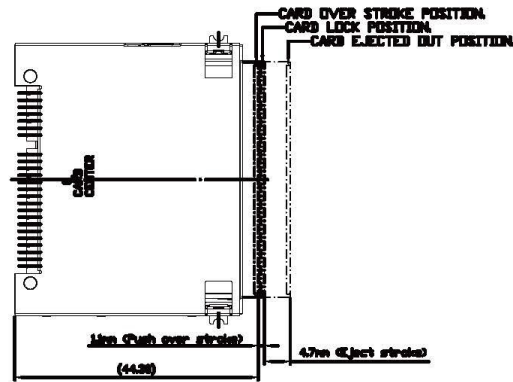


TERMINALS: 4425  
RECOMMENDED PC BOARD LAYOUT

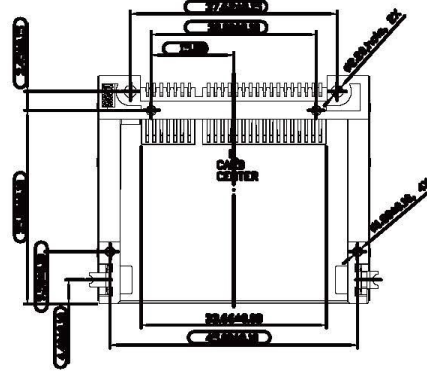

**NOTES:**


**1. MATERIAL:**

- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Slider : Engineering plastic , LCP with G.F reinforced , black per UL94 V-0 rate.
- 1-3 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-4 Spring : Piano thread
- 1-5 Metal cover : Stainless steel sheet SUS304 0.2t.
- 1-6 Crank : Stainless rod SUS 304.
- 1-7 Card lock : Stainless steel SUS 304.

**2. PLATING:**

- Contact area: 0.254  $\mu$ m (10  $\mu$ " minimum) or 0.762  $\mu$ m (30  $\mu$ " ) gold plating
- Solder zone: 2.54  $\mu$ m (100  $\mu$ " ) matte Tin, 1.27  $\mu$ m (50  $\mu$ " ) min. Nickel underplating over all.
- 3. RoHS compliant products.

- 1. CONTACT TYPE: Male**
- 2. CONTACT NUMBER: 24**
- 3. SHELL MATERIAL: Stainless steel 8.35H**
- 4. SOLDER TAILS AREA PLATING: TIN**

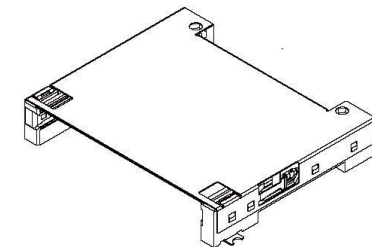


**RoHS Compliant**


**All Connectors**

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettenerstr. 25

DRAWING BY CY		TOLERANCES ARE X $\pm$ .X $\pm$ 0.30 .XX $\pm$ 0.20 .XXX $\pm$ ANG $\pm$
CHECKED BY GENIUS		
UNIT/ mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



**ORDER INFORMATION**

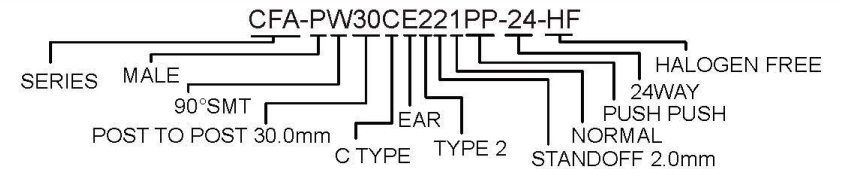

**DESCRIPTION:** CFAST HOST CONNECTOR WITH PUSH-PUSH TYPE II,8.35H