

Pin Type	DIM L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	D	EN-02-0906	09/04/02'	TOM
General	4.25 mm	All Other Pins	E	EN-04-0211	02/20/04'	TONY
Power	5.0 mm	1,13,38,50	F	EN-05-0116	01/11/05'	TONY

DIMENSION IN mm [Inch]		PROD. SPEC SP0028
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-004
.X \pm 0.30	X' \pm 1'	APPROVE <i>[Signature]</i>
.XX \pm 0.20	X" \pm 0.5'	CHECK <i>[Signature]</i>
.XXX \pm 0.10	.XX' \pm 0.25'	DRAW <i>[Signature]</i>

Allconnectors
 www.allconnectors.de
 info@allconnectors.de
 Tel.: 0049 711 209504
 Fax: 0049 711 209504
 20794 Filderstadt - Germany


CF CARD CONN. TYPE1,2
 TITLE
 STAND-OFF 0.0mm NORMAL TYPE

CUSTOMER DRAWING

FILE NO. KFP-028 DWG NO. CFCMD-45XXXW00X

SIZE **A4** PROJ. SHEET 1 / 2

SCALE 1:1 REV F

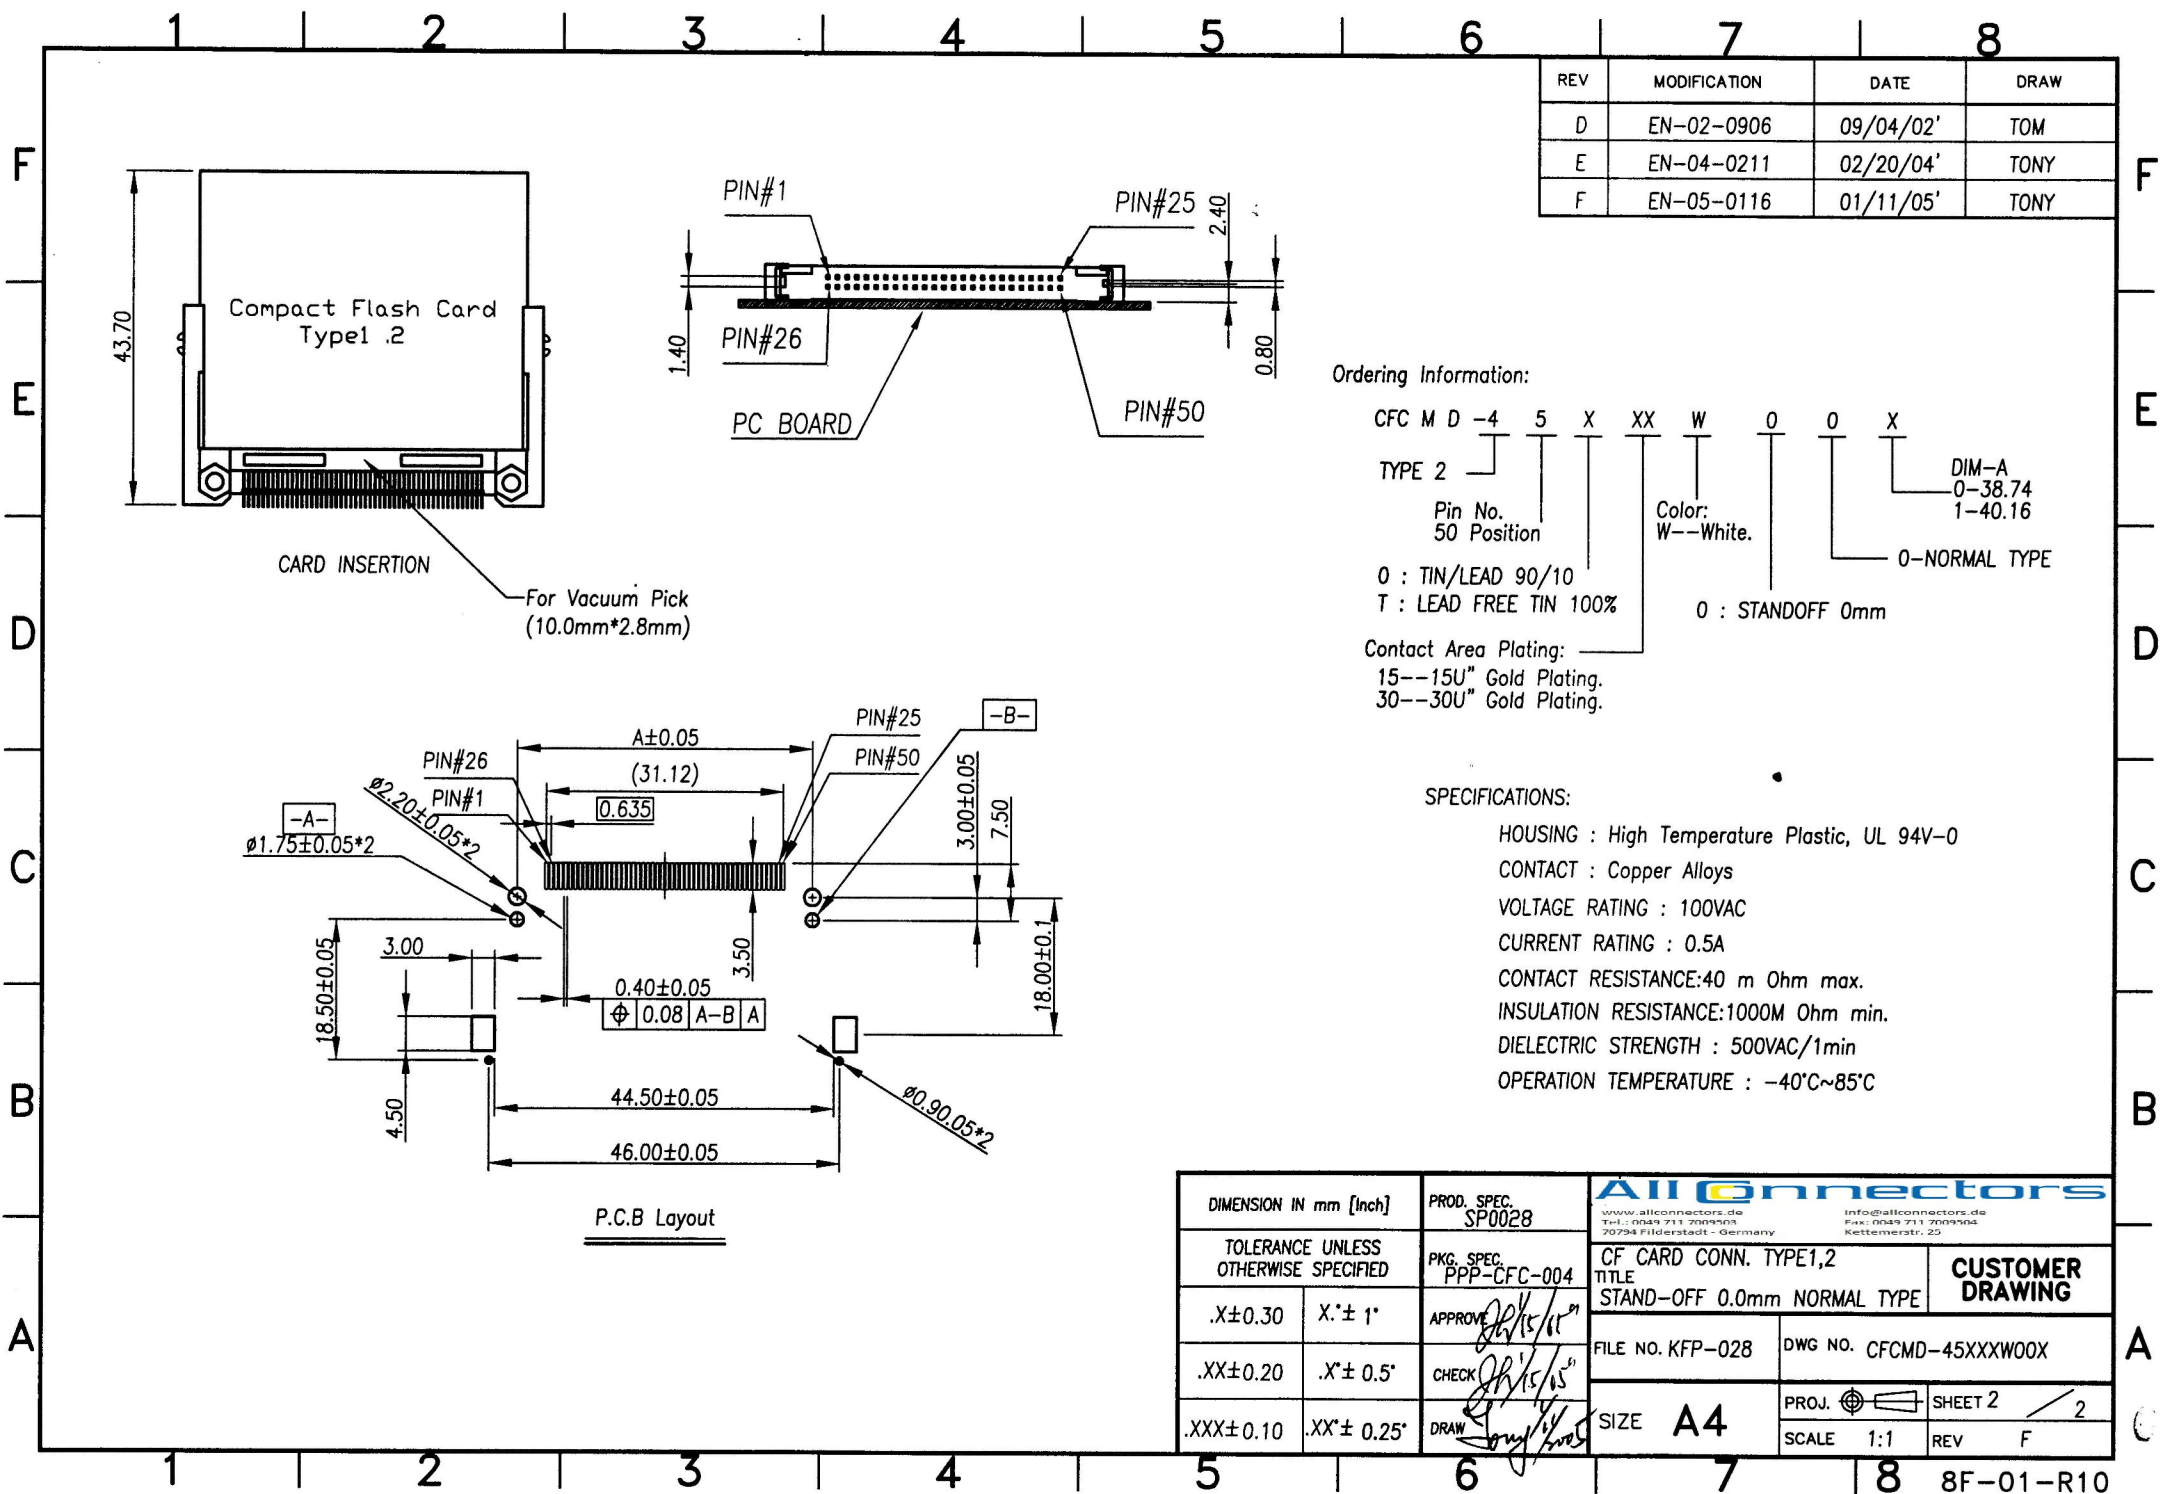

REV	MODIFICATION	DATE	DRAW
D	EN-02-0906	09/04/02'	TOM
E	EN-04-0211	02/20/04'	TONY
F	EN-05-0116	01/11/05'	TONY

Ordering Information:

CFC M D -4 5 X XX W 0 0 X
 TYPE 2
 Pin No. 50 Position
 Color: W--White.
 0 : TIN/LEAD 90/10
 T : LEAD FREE TIN 100%
 Contact Area Plating:
 15--15U" Gold Plating.
 30--30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	 <small>www.allconnectors.de Tel.: 0049 711 7009304 70794 Filderstadt - Germany info@allconnectors.de Fax: 0049 711 7009304 Kettnerstr. 25</small>	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-004	CFC CARD CONN. TYPE1,2 TITLE STAND-OFF 0.0mm NORMAL TYPE	
.X±0.30	X.*± 1'	APPROVE <i>[Signature]</i>	FILE NO. KFP-028	CUSTOMER DRAWING
.XX±0.20	.X.*± 0.5'	CHECK <i>[Signature]</i>	DWG NO. CFCMD-45XXXW00X	
.XXX±0.10	.XX.*± 0.25'	DRAW <i>[Signature]</i>	SIZE A4	PROJ. SHEET 2 / 2
			SCALE 1:1	REV F