


**ELECTRICAL CHARACTERISTICS**

Contact Current Rating:1Amperes.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:30Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

**Material**

Contact :Copper Alloy.  
 Insulator:PA6T ,  
 Shell: SPCC.  
 Z-Piece: Copper Alloy.

**RECOMMEND PCB LAYOUT**

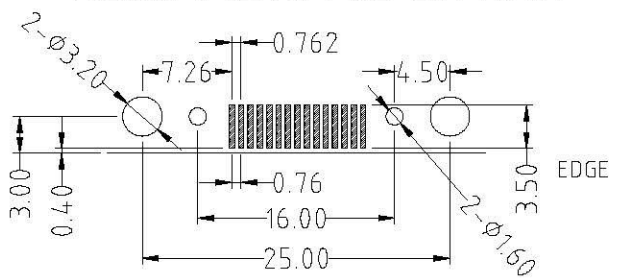

HDW-SNZ1-15-LF  
LEADFREE

RoHS Compliant



www.allconnectors.de  
 info@allconnectors.de  
 Tel.: 0049 711 706500  
 Fax: 0049 711 706504  
 20091 Hilderstact - Germany  
 Kettlagerstr. 20

PART NO. HDW-SNZ1-15		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG		DESCRIP TION:				
DWG NO. HDW-SNZ1-15		DRAWING BY								
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE			
UNIT / mm	SCALE 1:1									