

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
 BACK SHELL TIN FINISHED
 DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS


SIGNAL CONTACT CURRENT RATING : 5.0 AMPS

SIGNAL CONTACT RESISTANCE : 2.7 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

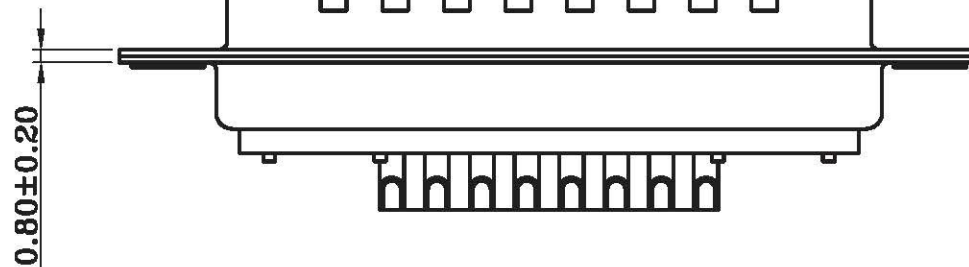

DWS-P-17W2-LF
 LEADFREE

RoHS Compliant

All connectors

www.allconnectors.de
 Tel.: 0049 711 7005503
 20/94 Hiltelstraße Germany

info@allconnectors.de
 Fax: 0049 711 7005504
 Kottbusstr. 2/a

PART NO. DWS-P-17W2

DWG NO. DWS-P-17W2

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG

DESCRIPTION:

AREA

REVISIONS

DATE