


ELECTRICAL CHARACTERISTICS


Contact Current Rating: 3Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000Megohms Min.
 Contact Resistance: 30Milliohms Max.
Operating Temperature: -55°C to +105°C

Material

Housing: PBT.
 Contact: Copper Alloy.
 Shell: SPCC.
 Rivet: Copper Alloy or Zinc.
 Z-Piece: Copper Alloy.

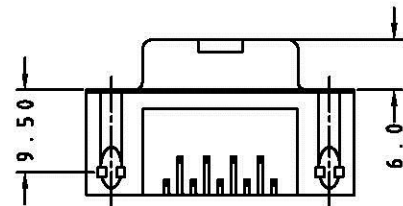

DR-PGLS-09-LF
 LEADFREE
 RoHS Compliant

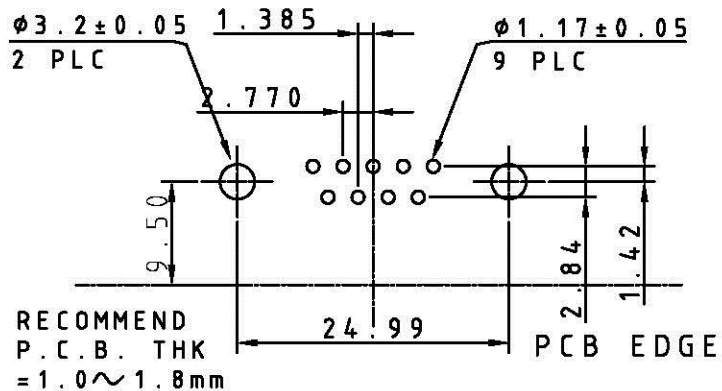

Allconnectors

www.allconnectors.de
 Tel: +49 431 200909
 20754 Finkenfeldt, Germany

info@allconnectors.de
 Fax: +49 431 200904
 Kollmannstr. 25

PART NO. DR-PGLS-09

DWG NO. DR-PGLS-09

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE