


Recommend P.C.B. Layout

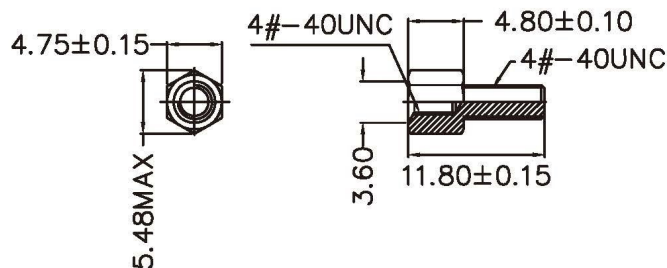

Material:

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Selective Gold over Nickel Plated.
4. Shell: Steel with Nickel or Tin or Zinc Plated.

Specification:

1. Current Rating: 5 Amps.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
DR-PGNH-09	16.92	24.99	30.81	11.08
DR-PGNH-15	25.25	33.32	39.14	19.39
DR-PGNH-25	38.96	47.04	53.04	33.24
DR-PGNH-37	55.42	63.50	69.32	49.86

All Connectors


www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant

DRAWING BY CY		TOLERANCES ARE X ± .X ± 0.30 .XX ± 0.15 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

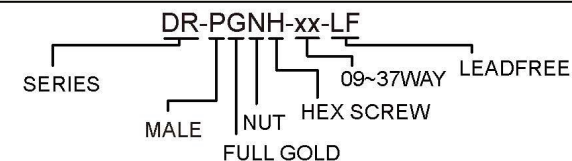

DESCRIPTION: D-SUB RIGHT ANGLE MALE CONNECTOR 8.08mm WITH RIVET TYPE