
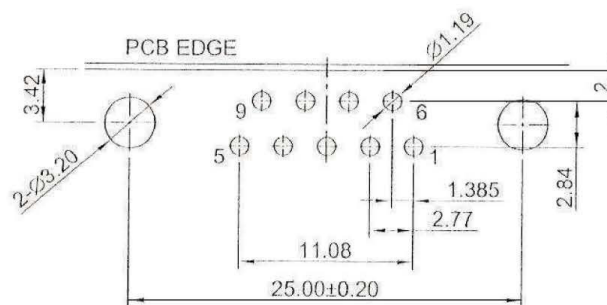


#### MATERIAL:

INSULATOR : PBT, UL 94V-0.  
 CONTACT : COPPER ALLOY.  
 CONTACT FINISH : GOLD OVER NICKEL.  
 SHELL : STEEL, NICKEL PLATED.  
 BOARDLOCK : BRASS, TIN PLATED.  
 RIVETED INSERT : BRASS, NICKEL PLATED.

#### SPECIFICATION:

CURRENT RATING : 5 AMP.  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.  
 INSULATION RESISTANCE : 1000M  $\Omega$  MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15m  $\Omega$  MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C.

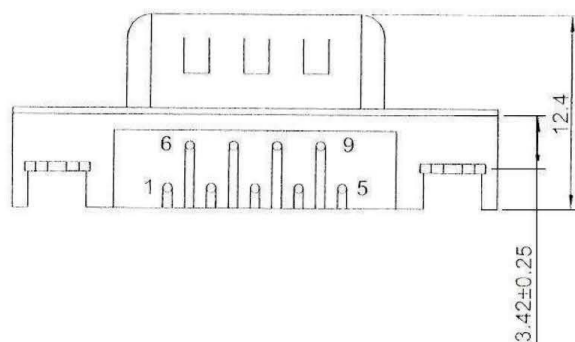

**All Connectors**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PPOJECTION



**ORDER INFORMATION**

DR20-PN-09-LF

SERIES MALE NUT 09WAY LEADFREE

DESCRIPTION: