

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 1000V/60sec. r.m.s.
 Insulation Resistance: 5000 Megohms Minimum. at DC 500.
 Contact Resistance: 25 Milliohms Maximum.
 Operating Temperature: -55°C to +105°C.

MECHANICAL CHARACTERISTICS:


Contact Insertion Force: 341 g. Maximum.
 Contact Separation Force: 21 g. Minimum.

MATERIALS:

Contacts: Brass.
 Insulator: PBT UL 94V-0 Rated.
 Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash.
 Shell: Nickel Plated.

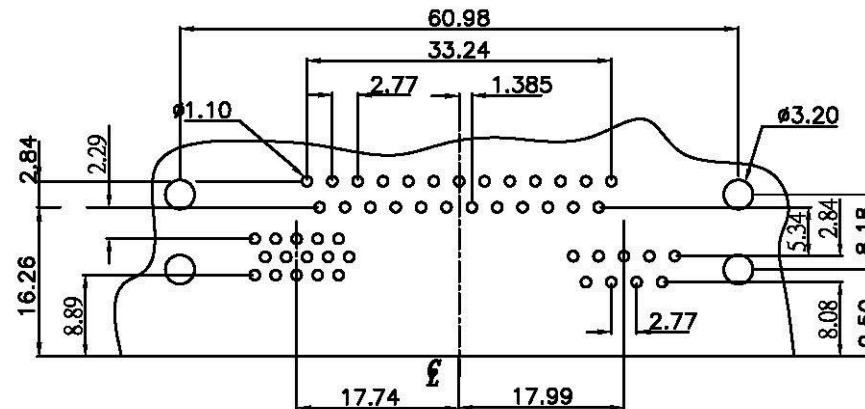

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

All Connectors

www.allconnectors.de
 Toll: 0049 711 7009502
 70754 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Keitnerstr. 25

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	X ±
DATE		.X ±
SIZE A4	PPOJECTION	.XX ±
		.XXX ±
		ANG ±



ORDER INFORMATION

DRB1-FN8-2539-LF
 SERIES | LEADFREE
 | 25 TO 15/09 WAY
 | 8.89mm
 NUT
 FEMALE TO FEMALE/ MALE

DESCRIPTION: **TRIPLE D-SUB 25 FEMALE LPT1 PORT/15 FEMALE H/Dx2 VGA PORT**