



MATERIAL:

INSULATOR : PBT, UL 94V-0. Δ
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : STEEL.
 BOARDLOCK : BRASS, TIN PLATED.
 RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
 CONTACT RESISTANCE : 15m Ω MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

DRF-PGN-xx-LF
 T
 LEADFREE
 RoHS Compliant

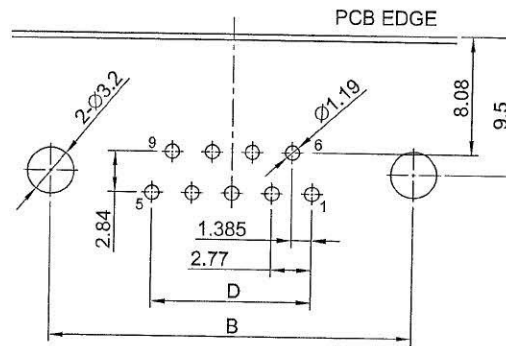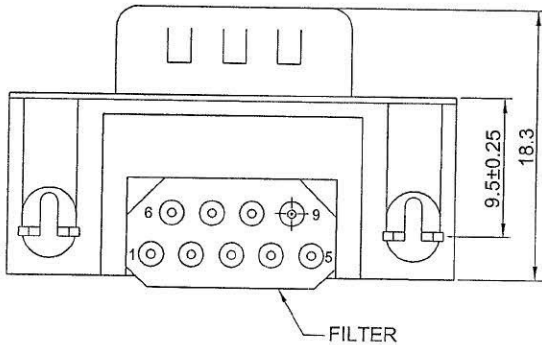

| POSITION | A ± 0.20 | B ± 0.20 | C ± 0.38 | D |
|----------|----------|----------|----------|-------|
| 09 PIN | 16.90 | 25.00 | 30.80 | 11.08 |
| 15 PIN | 25.25 | 33.30 | 39.20 | 19.39 |
| 25 PIN | 38.95 | 47.05 | 53.05 | 33.24 |
| 37 PIN | 55.40 | 63.50 | 69.40 | 49.86 |

Allconnectors

www.allconnectors.de
 TEL: 0049 711 7009003
 70734 Filderstadt Germany

info@allconnectors.de
 Fax: 0049 711 7009004
 Bellenbergstr. 25

PART NO. DRF-PGN-xx

DWG NO. DRF-PGN-xx

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

