
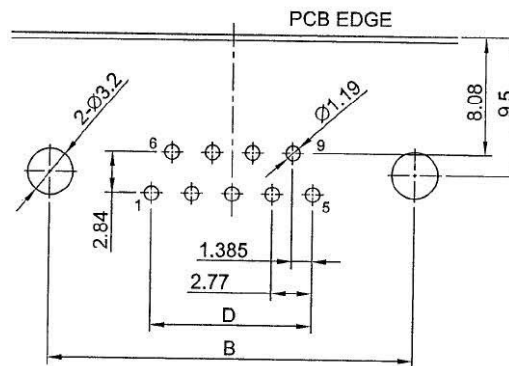


**MATERIAL:**

INSULATOR : PBT, UL 94V-0,  $\Delta$   
 CONTACT : COPPER ALLOY.  
 CONTACT FINISH : GOLD OVER NICKEL.  
 SHELL : STEEL.  
 BOARDLOCK : BRASS, TIN PLATED.  
 RIVETED INSERT : BRASS, NICKEL PLATED.

**SPECIFICATION:**

CURRENT RATING : 5 AMP  
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.  
 INSULATION RESISTANCE : 1000M $\Omega$  MIN. AT 500V DC.  
 CONTACT RESISTANCE : 15m $\Omega$  MAX.  
 OPERATING TEMPERATURE : -55°C ~ +105°C.

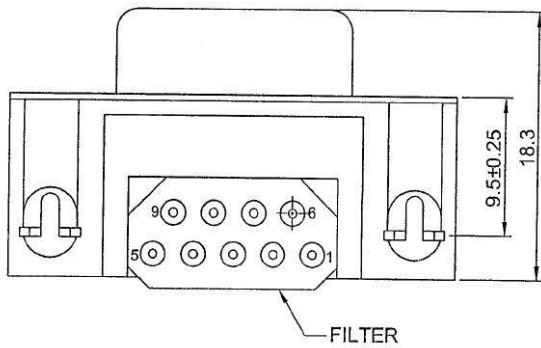

DRF-SGN-xx-LF  
 LEADFREE

RoHS Compliant

POSITION	A $\pm$ 0.20	B $\pm$ 0.20	C $\pm$ 0.38	D
09 PIN	16.30	25.00	30.80	11.08
15 PIN	24.60	33.30	39.20	19.39
25 PIN	38.35	47.05	53.05	33.24
37 PIN	54.80	63.50	69.40	49.86

**Allconnectors**

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7005903 Fax: 0049 711 7005901  
 20794 Fildesfeld, Germany Kollmannstr. 25

PART NO. DRF-SGN-xx

DWG NO. DRF-SGN-xx

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X  $\pm$  0.2  
 .XX  $\pm$  0.1  
 .XXX  $\pm$   
 AWG

DESCRIPTION:

UNIT / mm

SCALE 1:1

PROJECTION

AREA

REVISIONS

HK

DATE