
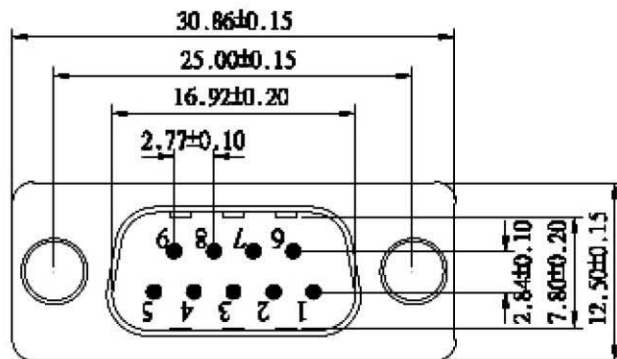


MA 003A (DB9M/HD15F ADAPTOR)

PIN OUT: 09Male

15Female

1	-----	1
2	-----	2
3	-----	3
4	-----	13
5	-----	14
6	-----	6
7	-----	7
8	-----	8
9	-----	10+11
G	-----	G

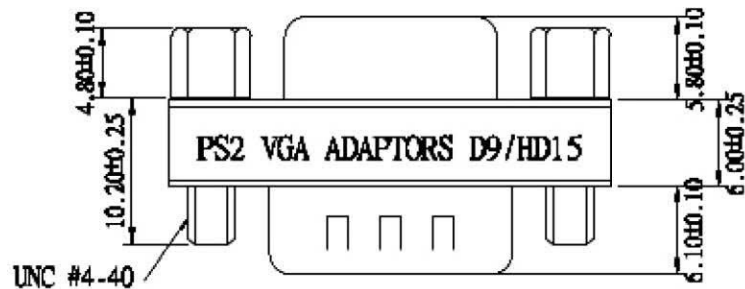

Label: orange color with white character

One side: PS2 VGA ADAPTORS D9/HD15

The other side: MINI ADAPTER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 500V AC for one minute

INSULATOR RESISTANCE: 500MΩ min at 500V DC

TEMPERATURE: -25°C—+105°C

DBHD-ES-0915-LF

LEADFREE

RoHS Compliant

All Connectors

www.allconnectors.com  
Tel.: 0049 711 7009503  
70794 Fleiterstadt - Germany

info@allconnectors.com  
Fax: 0049 711 7005504  
kettenstr. 25

PART NO. DBHD-ES-0915

DWG NO. DBHD-ES-0915

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE