



(DB9M/25F ADAPTOR)

PIN OUT: 09Male 25Female

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

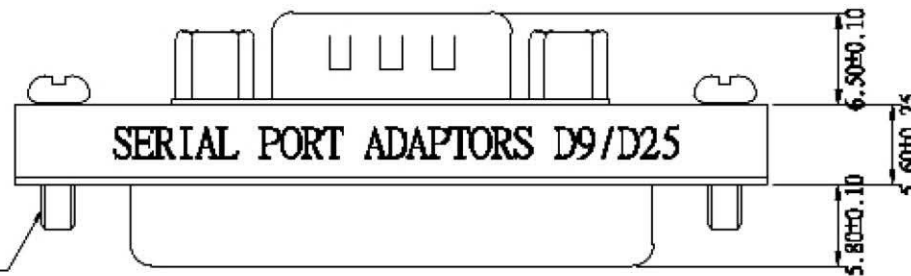

UNC #4-40

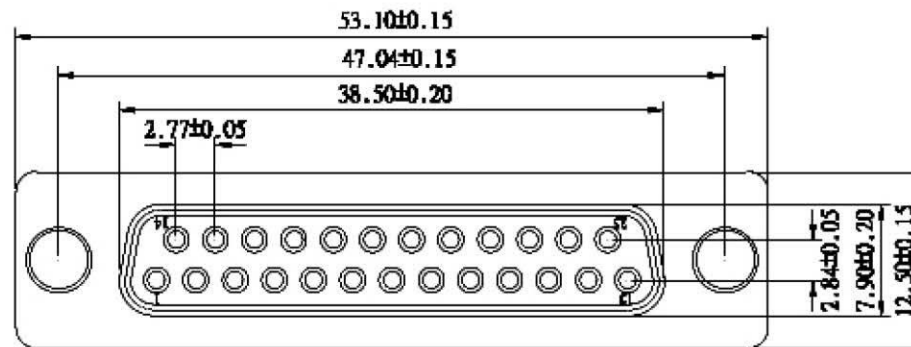

Label: orange color with white character
 One side: SERIAL PORT ADAPTOR D9/D25
 The other side: MINI ADAPTER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell (Nickel Silver)
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 500V AC for one minute
 INSULATOR RESISTANCE: 500MΩ min at 500V DC
 TEMPERATURE: -25°C—+105°C

DBX2-ES-0925-LF
 LEADFREE

All Connectors

www.allconnectors.de
 TEL: 0049 711 2099209
 40784 Hilbersdorf, Germany

Info@allconnectors.de
 Fax: 0049 711 2099204
 Kollmannstr. 25

PART NO. DBX2-ES-0925

DWG NO. DBX2-ES-0925

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



RoHS Compliant

TOLERANCES ARE

.X±0.2
 .XX±
 .XXX±
 AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE