
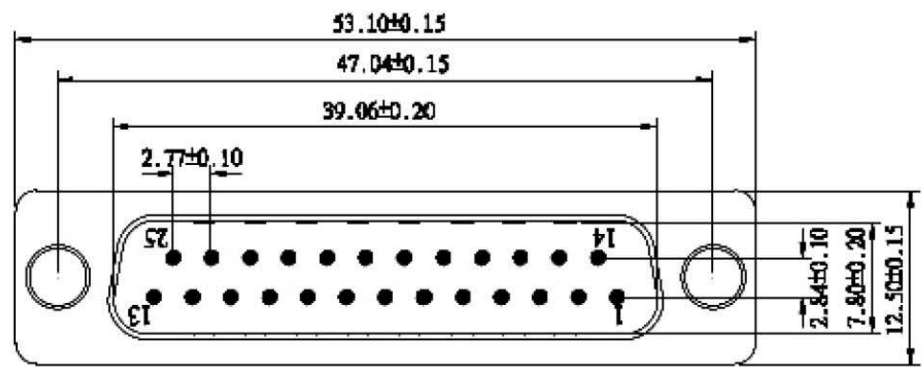


DGC 25 M/F GENDER CHANGER
PIN OUT: 25Male 25Female

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

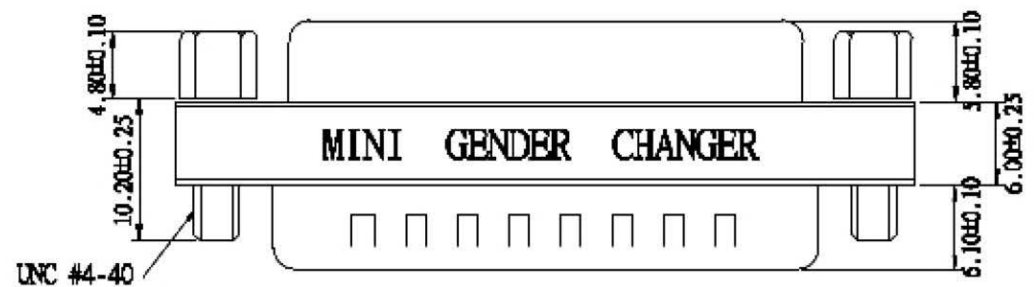

Label: yellow color with black character
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906
SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000MΩ min at 500V DC
 TEMPERATURE: -55°C — +105°C

DBX2-ES-2525-LF
LEADFREE

RoHS Compliant

All Connectors
 www.allconnectors.de
 info@allconnectors.de
 Tel: 0049 711 709509
 Fax: 0049 711 709504
 70794 Filderstadt - Germany
 Kellenersstr. 25

PART NO. DBX2-ES-2525		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:
DWG NO. DBX2-ES-2525		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE