


Recommend PCB Layout

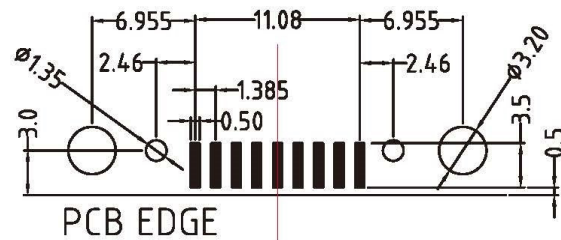

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material

Contact : Copper Alloy.
 Insulator: LCP. [Select PA6T /PA9T]
 Shell: SPCC.
 Z-Piece: Copper Alloy.

All Connectors


www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/ mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

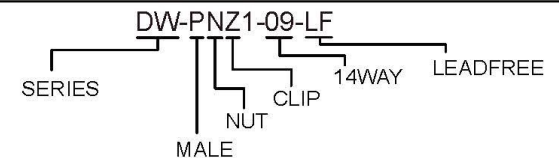

DESCRIPTION: