


Recommend PCB Layout

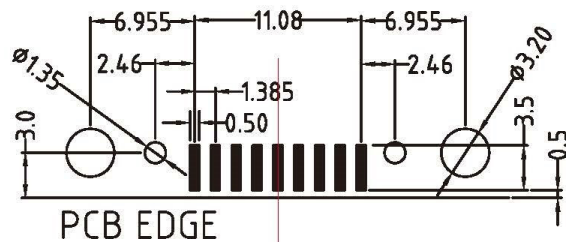

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

Material

Contact: Copper Alloy.
 Insulator: LCP. [Select PA6T / PA9T]
 Shell: SPCC.
 Z-Piece: Copper Alloy.

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettnerstr. 25


RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4


TOLERANCES ARE

X.±
 .X±
 .XX±
 .XXX±
 ANG±

PJECTION



ORDER INFORMATION

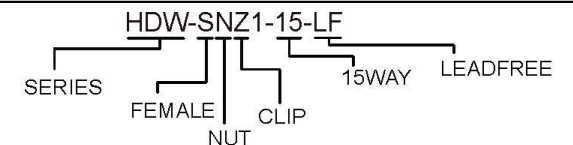

DESCRIPTION: