

T:1.6 Dimensions of PC board holes  
Tolerance :  $\pm 0.1$  (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R40AM-20	$\phi 2.0$	
DCJ-R40AM-25	$\phi 2.5$	
DCJ-R40AM-165	$\phi 1.65$	

7	COAT	1	ALOARY	MB:Cu Ni PLATED
6	CONTACT FOOT	1	BRASS	MB:Cu Ni PLATED
5	PIN	1	BRASS	MB:Cu Ni PLATED
4	CONTACT FOOT	1	BRASS	MB:Cu Ag PLATED
3	CURVE PIECE	1	BRASS	MB:Cu Ag PLATED
2	SPRING PIECE	1	BRONZE	MB:Cu Ag PLATED
1	HOUSING	1	PBT	
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

RoHS Compliant

TOLERANCES ARE

**All Connectors**

DRAWING BY CY

X  $\pm$

CHECKED BY GENIUS

.X  $\pm$

UNIT / mm

SCALE 1 : 1

.XX  $\pm$

DATE

.XXX  $\pm$


SIZE A4

P PROJECTION

ANG  $\pm$



ORDER INFORMATION

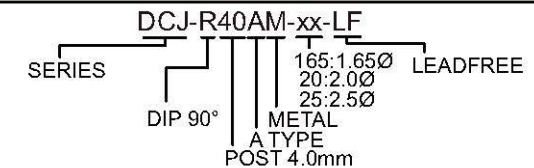

DESCRIPTION: DC POWER JACK

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filzbergstr. - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettnerstr. 25