



SWITCH CIRCUIT

MATERIAL AND FINISH AS BELOW



WHEN CARD IS EJECTED

WHEN CARD IS INSERTED

A	Housing	LCP UL94V-0 Black	E	
B	Contact	Phosphor Bronze C5210, Contact Area: Gold Flash	F	
C	Latch	Stainless Steel SUS301	G	
D			H	

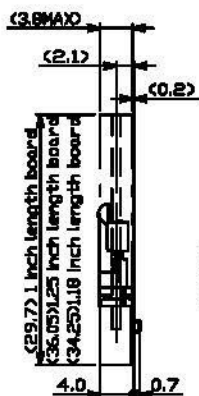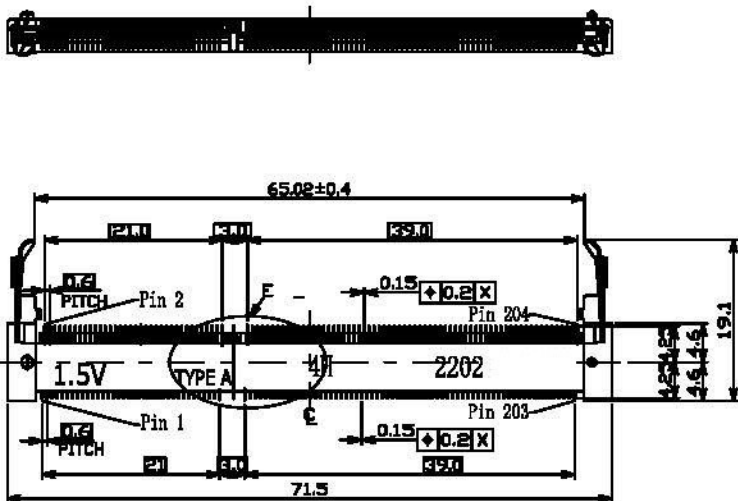

NOTES:  
 DATE CODE 2202 (YWWD)  
 Y: 2 YEAR(2012)  
 WW:20 WEEK(01~52)  
 D: 2 DAY(01~07)

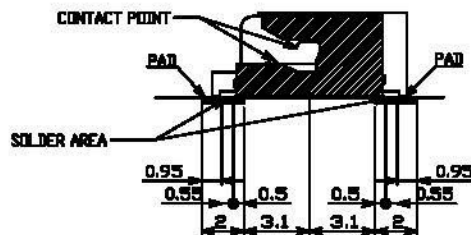

**SPECIFICATION:**

- 1. ELECTRICAL**  
 1.1 Current Rating: 0.5A per pin  
 1.2 Voltage Rating: 25V AC/DC  
 1.3 Contact Resistance: 60mΩ  
 1.4 Insulation Resistance: 500MΩ  
 1.5 Dielectric Withstanding Voltage: 125VAC

- 2. MECHANICAL**  
 2.1 Durability: 25 Cycle  
 2.2 Latch Retention Force: 8 N/Pos. Min

- 3. ENVIRONMENTAL**  
 3.1 Operating temperature range: -40°C~+85°C  
 3.2 Storage temperature range: -40°C~+85°C

- 4. SOLDER ABILITY**  
 4.1 Recommended IR Reflow Temperature: 255°C 10Sec

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
----	----	----	----	----	----	----	----	----	-----	-----	-----


PIN ASSIGNMENT

122A-40A00	SO DIMM DDR3 Socket 1.5V 204Pin Type 4.0H, Contact Area: Gold Flash
------------	---

PRODUCT NO.	DESCRIPTION		<p>www.allconnectors.de                  info@allconnectors.de                  Tel: +49 410 705208                  Fax: +49 41 705209                  20794 Riederstall, Germany                  Kullmannstr. 23</p>	
UNLESS OTHERWISE SPECIFIED TOLERANCE	ANGLES	ANG.		±0.3
	LINEAR	0.		±0.25
		0.00		±0.20
	SCALE	AS SHOWN		UNIT: mm
DRAWN	Willis	2012/12/05	DRAWN NAME:	
CHECKED	Angel	2012/12/05	SO DIMM DDR3 Socket 1.5V 204Pin 4.0H Type	
APPROVED	Ken	2012/12/05	PRODUCT NO. 122A-40A00	
REV. 1.0	FILE NAME	122A-40A00_B_1		

△	Revise:	
△	Revise:	
△	Revise:	









REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1						A4	1.0	122A-40A00_B_1

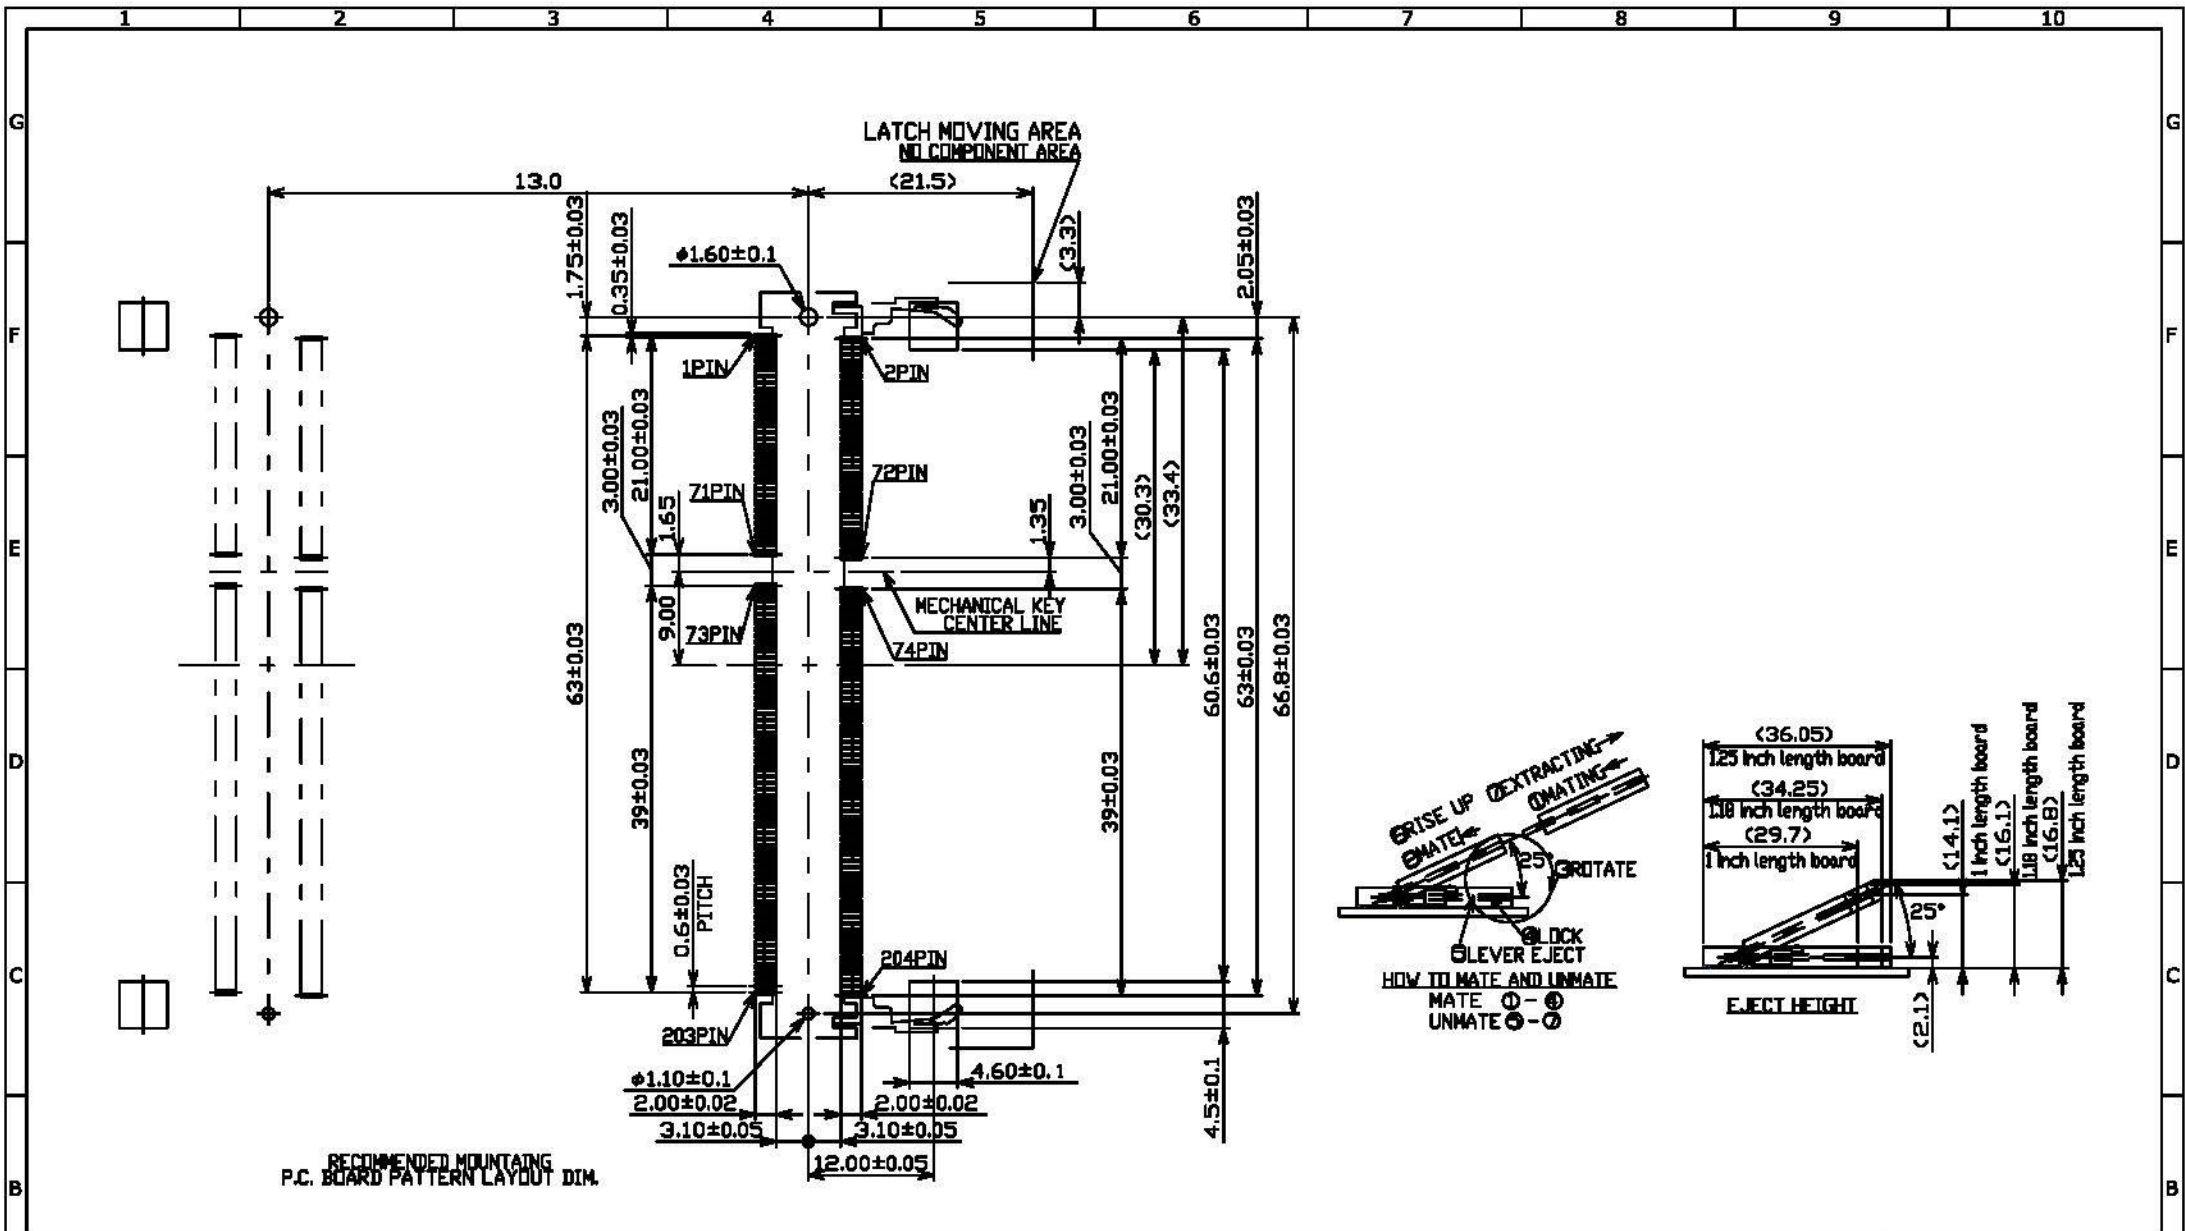

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			4			A4	1.0	122A-40A00_B_1
2			5					
3			6					
4			7					
5			8					
6			9					
7			10					

UNLESS OTHERWISE SPECIFIED TOLERANCE			All connectors	
ANGLES	ANG.	±FP	www.allconnectors.de	info@allconnectors.de
LINEAR	0.	±0.3	Tel.: 0049 711 70050 1	Fax: 0049 711 70050 4
	0.0	±0.25	70794 Filderstadt - Germany	Kellernstr. 25
	0.00	±0.20		
SCALE	AS SHOWN	UNIT: mm	DRAWN NAME:	
DRAWN	Willis	2012/12/05	SO DIMM DDR3 Socket 1.5V 204Pin 4.0H Type	
CHECKED	Angel	2012/12/05	PRODUCT NO.	122A-40A00
APPROVED	Ken	2012/12/05	FILE NAME	122A-40A00_B_1

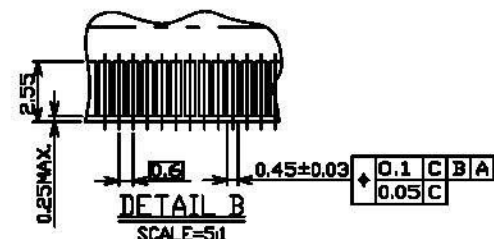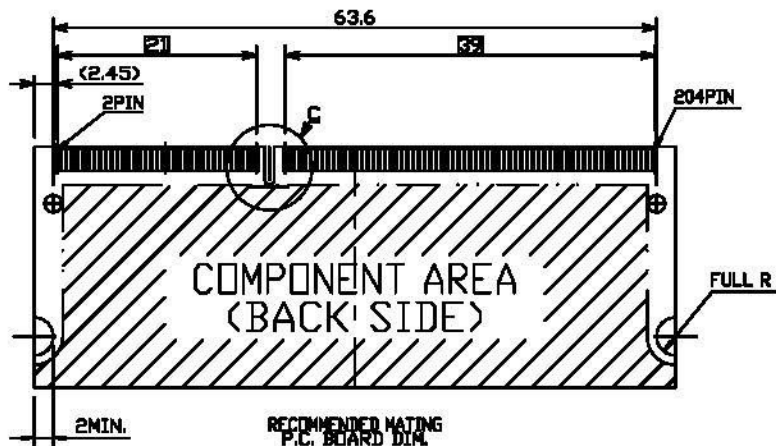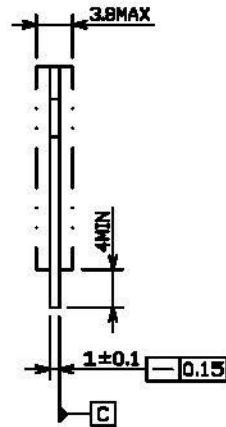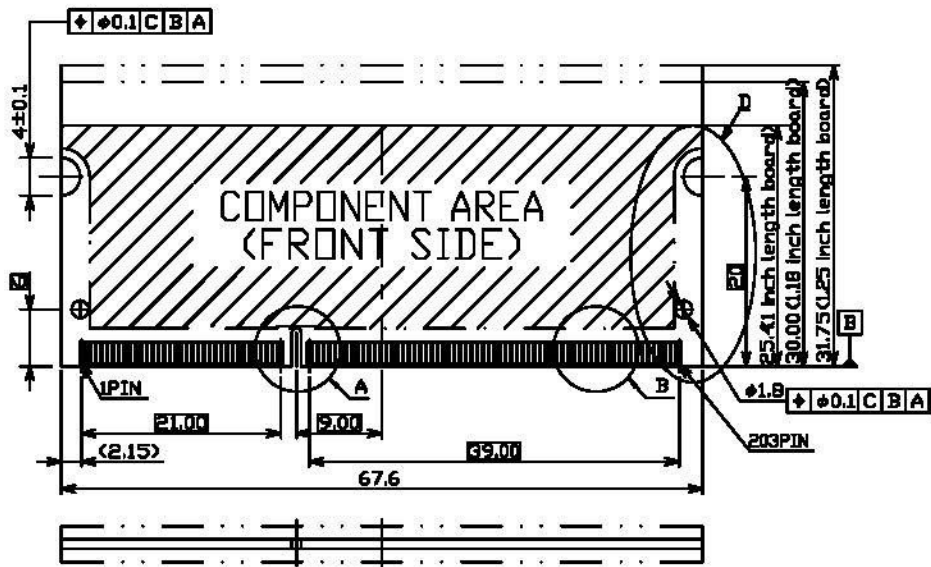


				UNLESS OTHERWISE SPECIFIED TOLERANCE				
				ANGLES	ANG.	±5°		
				LINEAR	0.	±0.3	<a href="http://www.allconnectors.com">www.allconnectors.com</a> info@allconnectors.com 10754 Hohenstadt - Germany	
					0.00	±0.20		info@allconnectors.com hag@p1011010001 kate@wertr.20
				SCALE	AS SHOWN	UNIT: mm	DRAWN NAME: SO DIMM DDR3 Socket 1.5V 204Pin 4.0H Type PRODUCT NO. 122A-40A00 FILE NAME 122A-40A00_B_1	
A				DRAWN	Willis	2012/12/05		
A				CHECKED	Angel	2012/12/05		
A				APPROVED	Ken	2012/12/05		
REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	
1						M	1.0	

**PACKAGING SPECIFICATION:**

**1. PACKING**

- 1.1 Quantity:**
- 20 Piece/Tray**
- 220 Piece/Inner Carton**
- 660 Piece/Outer Carton**

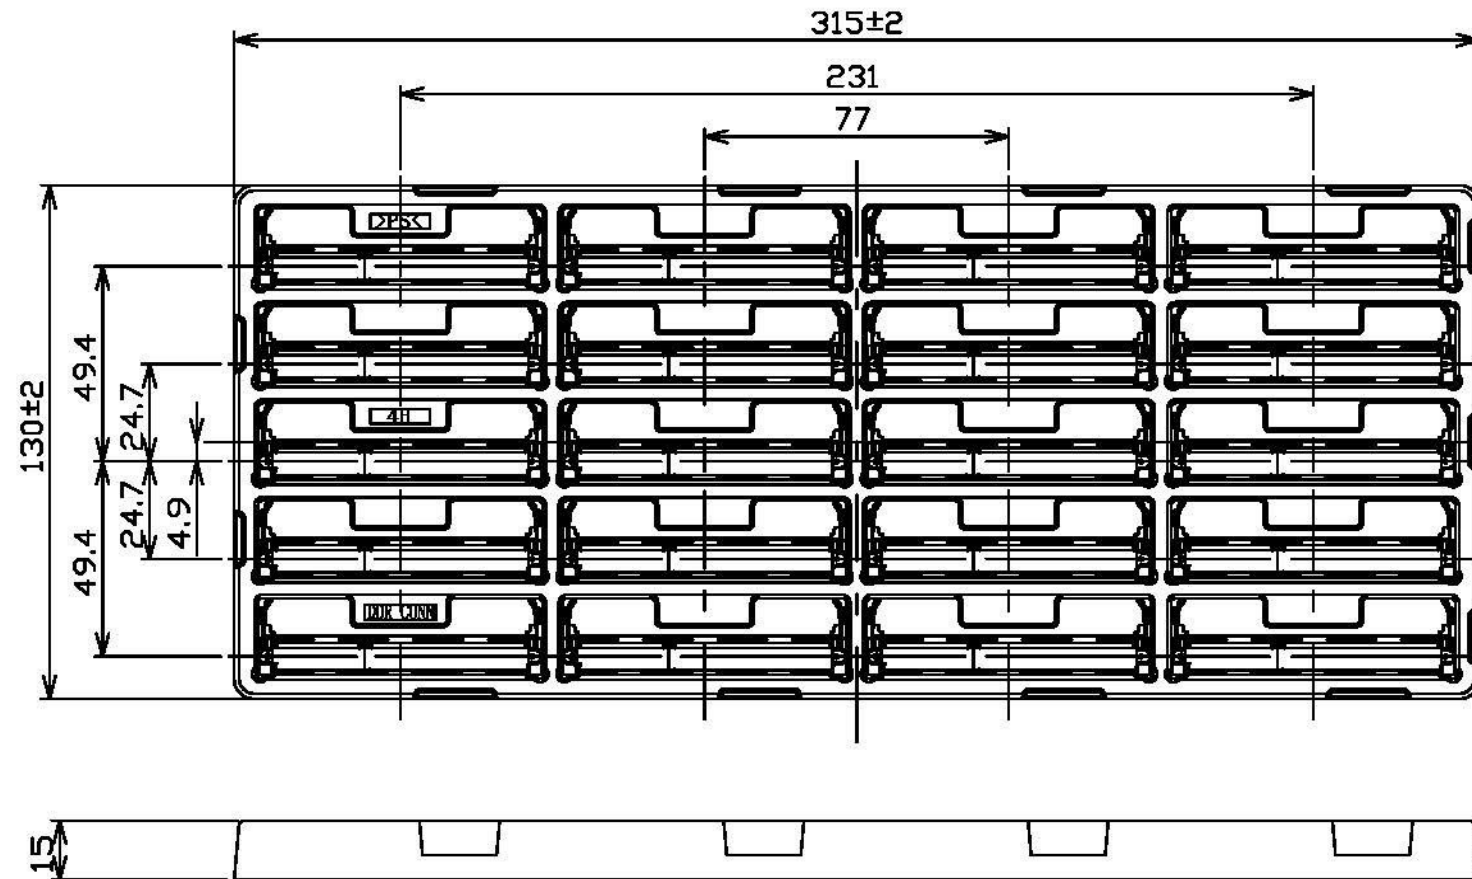

SOFT TRAY PACKAGING

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5P
	0.	±0.3
LINEAR	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm

**All connectors**

www.allconnectors.de info@allconnectors.de  
 T: +49 711 7003003 Fax: +49 711 700504  
 70734 Riedelstedt, Germany connect@ac.de

DRAWN	Willis	2012/12/05
CHECKED	Angel	2012/12/05
APPROVED	Ken	2012/12/05

DRAWN NAME:  
**SO DIMM DDR3 Socket 1.5V 204Pin 4.0H Type**

PRODUCT NO.	122A-40A00
FILE NAME	122A-40A00_D_1

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		

- △ Revise:
- △ Revise:
- △ Revise:

