

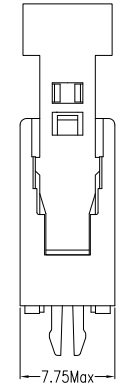
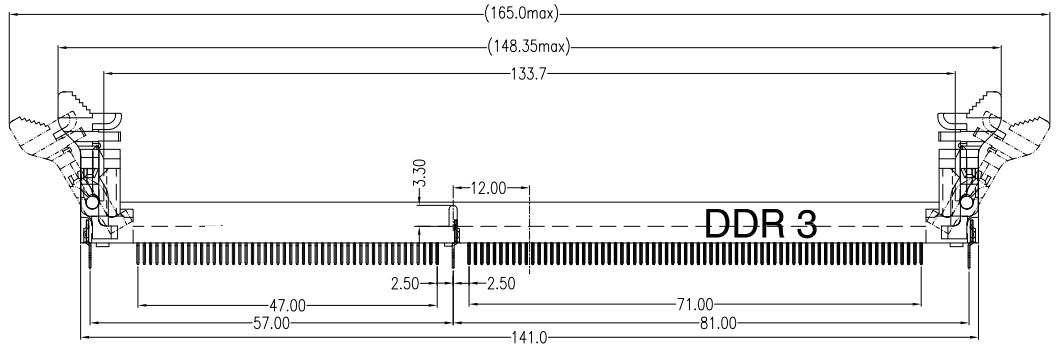



REV.	ECN.NO.	DATE
A	RELEASED	04/02/09

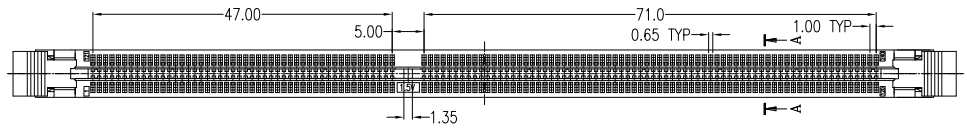


SCALE:2:1

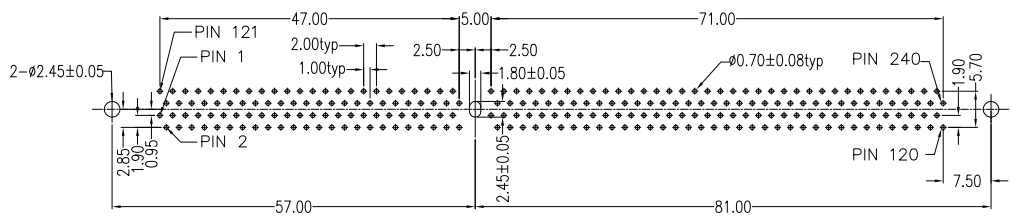

PCB LAYOUT

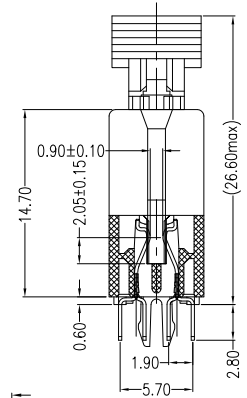

SECT:A-A  
SCALE:2:1

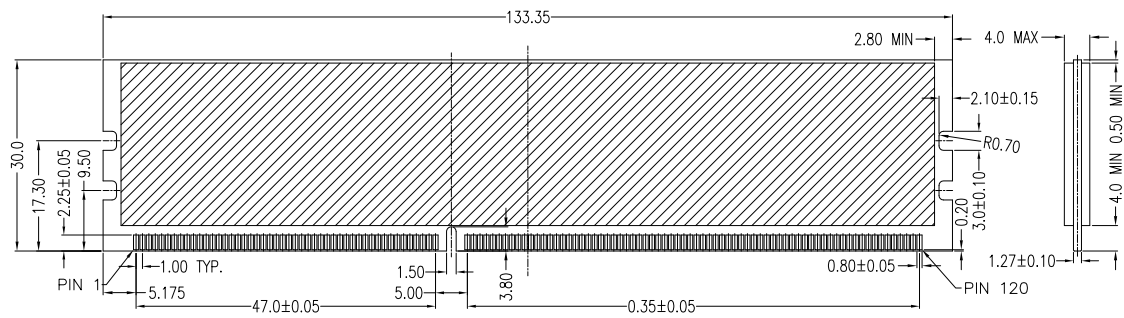

RECOMMENDED MODULE LAYOUT

**NOTES**

**\*MATERIAL:**

BODY: Nylon46+30%G.F, UL 94V-0 RATED.  
 EJECTOR: Nylon66+30%G.F,UL 94V-0 RATED.  
 COLOR: Black  
 CONTACT: Brass  
 CONTACT PLATING: Gold Plating Over Nickel On Contact  
 Area Tin Plating On Solder Tail

**\*MECHANICAL:**

RETENTION FORCE-TERMINAL: 300 Grams Min. Per  
 INSERTION FORCE: 35 lb. Max.  
 UNMATING FORCE: 14 Grams Min. Per Pin Pair


**\*ELECTRICAL SPECIFICATION**

CONTACT RESISTANCE: 30 Milliohms Max. Initial  
 INSULATION RESISTANCE: 1000 Megohms Min.  
 AT 500V DC  
 WITHSTAND VOLTAGE: 500 V AC,

**\*ENVIRONMENTAL:**

OPERATING TEMPERATURE: -55°C TO +105°C

**\*How To Order**

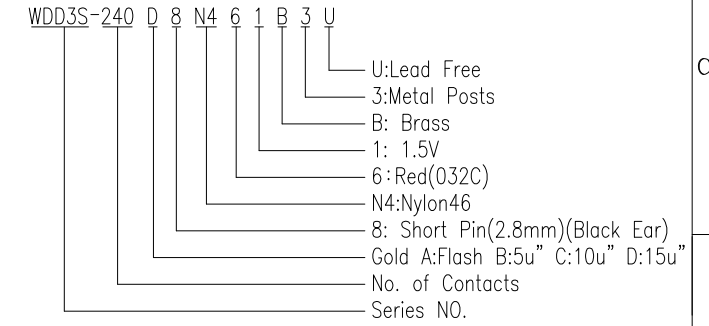

REV	Units	mm	Scale	1:1	Drawing By	Data
					LW	04/16/09
	Tolerance Unless Otherwise Specified				Reviewed By	Data
	.X	~	±0.38	YZZ	04/16/09	
	.XX	~	±0.25	Approval By	Data	
	.XXX	~	±0.20	Richard	04/21/09	
	Angle	~	± 3°			



www.allconnectors.eu | info@allconnectors.eu  
 Tel: +49 (0)711 / 358 110 20 | Fax: +49 (0)711 / 358 110 25

Date	04/02/09	Title	DDR3-240P Shield Metal Posts(Black Ear)Type
Sheet	1 of 1		
Third Angle Projection		Drawing No.	REV A