
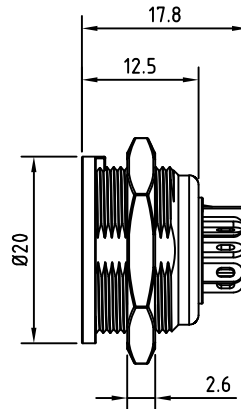



TEROUGH HOLE  
DIMENSION



**Specifications**

- rating : 100V AC 1A MAX
- contact resistance : pins-30mΩ MAX; shell-50mΩ MAX
- insulation resistance : MIN 100 MEGΩ @500V DC
- voltage withstand : 250V AC R.M.S. for 1 minute

RoHS  
LEAD FREE  
TOLERANCE .X±0.25 .XX±0.10

CONTACT ARRANGEMENT FRONT VIEW								
ANGLE	180°	216°	180°	240°	240°	270°	270°	262°
DS553-XP	3P	4P	5P	6P	7P	8P		

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	10-15-2010	PART NO.	DS553
DWN	GINA	REV.	0
CHK	KATY		
UNIT	MM		

ITEM Din Connector Lock Type

NOTE: REV.0 NEW