

This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	27/03/09	ECN09038
B				
C				

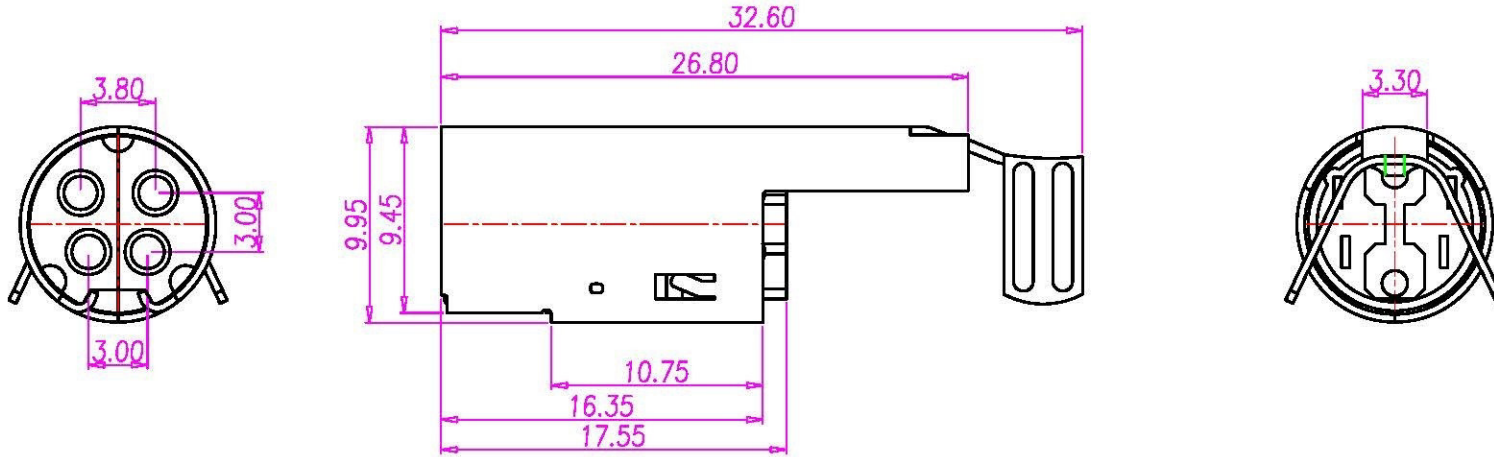


TABLE A

	PD-04F2-03	前黃色後黃色
	PD-04F2-02	前黑色後黑色
	PD-04F2-01	前黑色後黃色
	P/N	HOUSING COLOR

NOTE/備註:

- MATERIAL :**
 - HOUSING : PBT UL94V-0 ; COLOR : SEE TABLE A
 - CONTACT: PHOSPHOR BRONZE
 - SHELL : BRASS
- FINISH :**
 - CONTACT : TIN 100u" PLATING OVER NICKEL
 - SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
- ELECTRICAL SPECIFICATION :**
 - Rated current : 5A
 - Voltage :125V
- Environmental :**
 - Operation Temperature : -40 °C~85°C

DRAWN	Emly Suen	APP'D	Fido Weng	UNIT	mm	TOLERANCE
CHK'D	Emly Suen			SCALE	1:1	X ±0.20 XX ±0.10 XXX ±0.05 XXXX ±0.03 ANGULAR ±1°



Allconnectors

www.allconnectors.de
Tel.: 0049 711 7095303
70794 Filzschlamm, Germany

info@allconnectors.de
Fax: 0049 711 7095304
Kilbingerstr. 75

TITLE	POWER DIN 4PIN (F)			SHEET
PART NO.	SEE TABLE A	DWG NO.	QC1700	⊕
				VERSION A