
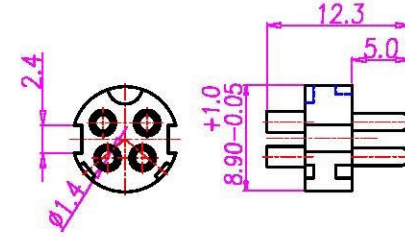


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPL. BY	DATE	ECN NO.
A	RELEASE	Fido Weng	12/01/08	ECN09003
B	UNTABLE	Fido Weng	26/06/09	
C	UNTABLE	Fido Weng	23/03/10	

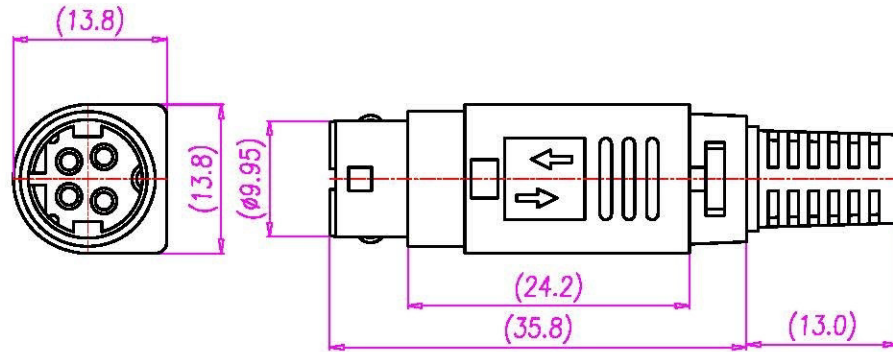

1-1. HOUSING & CONTACT ASSEMBLY



PD-04M2-38 PD-04M2-07 PD-04M2-21 PD-04M2-37
 PD-04M2-02 PD-04M2-08 PD-04M2-23 PD-04M2-40

PD-04M2-03 PD-04M2-13

P/N	DESCRIPTION	CABLE FIXER T	SR OD
PD-04M2-40	POWER 4PIN (M) 單箭頭黑色	0.8	7.0
PD-04M2-13	POWER 4PIN (M) 雙箭頭黑色	0.6	6.5
PD-04M2-37	POWER 4PIN (M) 單箭頭白灰色	0.8	5.5
PD-04M2-23	POWER 4PIN (M) 單箭頭黑色	0.8	4.0
PD-04M2-21	POWER 4PIN (M) 單箭頭黑色	0.8	7.0
PD-04M2-08	POWER 4PIN (M) 單箭頭黑色	0.8	5.0
PD-04M2-07	POWER 4PIN (M) 單箭頭黑色	0.8	5.5
PD-04M2-38	POWER 4PIN (M) 單箭頭貝古色	0.8	6.5
PD-04M2-02	POWER 4PIN (M) 單箭頭黑色	0.8	6.5
PD-04M2-03	POWER 4PIN (M) 雙箭頭黑色	0.8	6.5
P/N	DESCRIPTION	CABLE FIXER T	SR OD

1. MATERIAL:

- 1-1. HOUSING: PBT, UL94V-0
CONTACT: COPPER ALLOY.
- 1-2. PLASTIC COVER: ABS
- 1-3. METEL SHELL: COPPER ALLOY, NICKEL PLATED.
- 1-4. METEL CAP: COPPER ALLOY, NICKEL PLATED.
- 1-5. CABLE FIXER: COPPER ALLOY, TIN PLATED.
- 1-6. POM RING: POM
- 1-7. SPRING: STEEL, NICKEL PLATED.
- 1-8. PLASIC TUBE: ABS
- 1-9. SR: PVC

2. FINISH:

- 2-1. CONTACT: SILVER 50u"

3. ELETRICAL SPECICATION :

- 3-1. RATED CURRENT : 7.5A/DC MAX
- 3-2. RATED VOLTAGE : 20V/DC MAX

4. ENVIRONMENTAL :

- 4-1. OPERATION TEMPERATURE : -20 °C~85°C

DRAW	Emily Suen	APPVL	Fido Weng	UNIT	mm	TOLERANCE .x ±0.20 .0x ±0.10 .00x ±0.05 .000x ±0.03 ANGULA ±1°		www.allconnectors.de TEL:0949-711 98969 70754 Filderstadt Germany	info@allconnectors.de FAX:0949-711 98964 Kollmerstr. 25	TITLE	POWER 4PIN (M)			
CHECK	Emily Suen			SCALE	1:1					PART NO.	SEE TABLE A	DWG NO.	QC0361	