



1	2	3	4	5	6	7	8			
CUSTOMER	CUST P/N	FREEPORT P/N	RoHS Compliant	REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
ALL		18-9420xxxx								

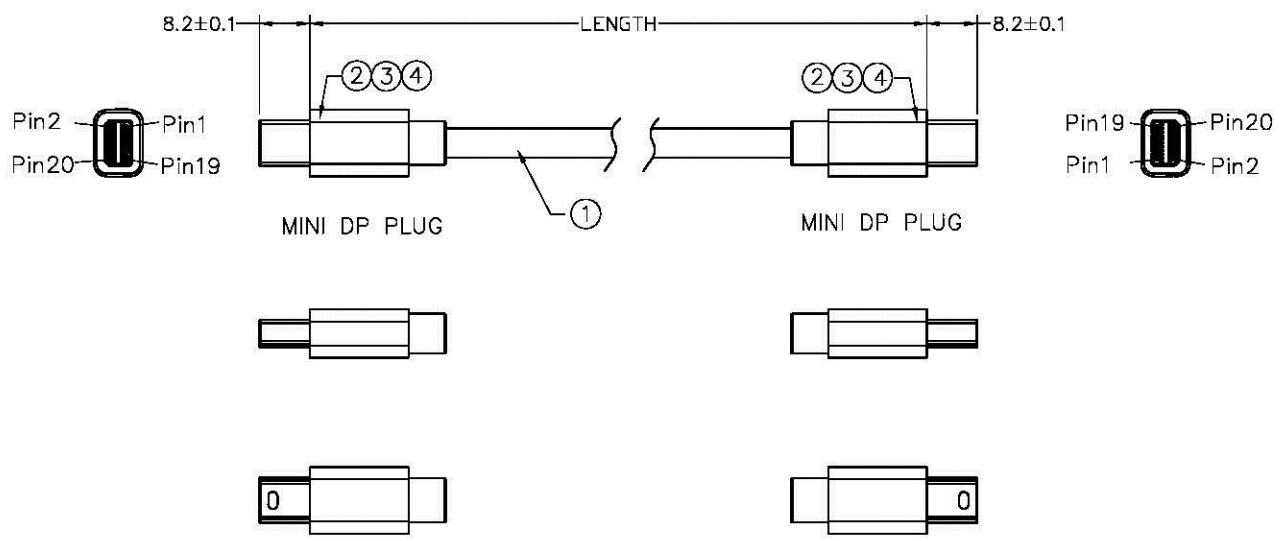

PIN ASSIGNMENT:

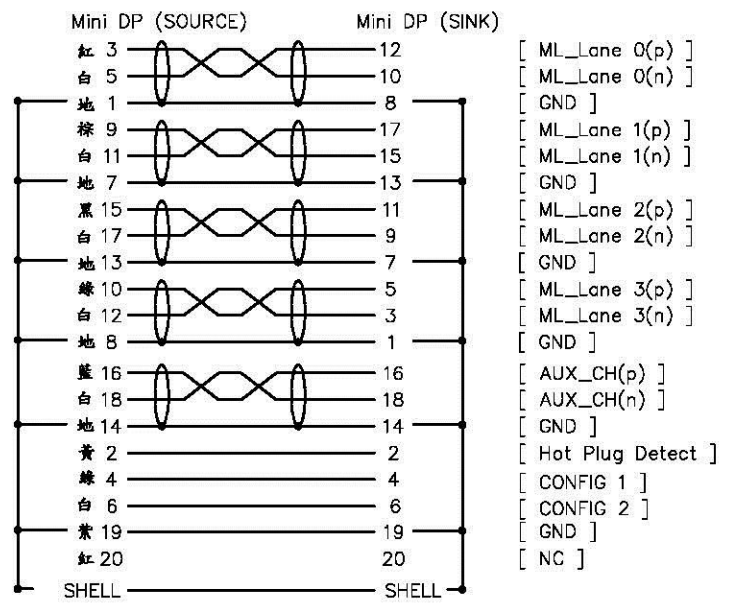

Electrical character:
 a. 100% open & short testing.
 b. Withstanding voltage: DC 300V 0.01Sec.
 c. Insulation resistance: 5M Ohm(Min).
 d. Conductive resistance: 3 Ohm(Max).

4	SR	White PVC	
3	OUTER COVER	MINI DP PLUG ABS OUTER COVER,White	
2	CONNECTOR 1	MINI DP HOT-BAR TYPE: CONTACT:15U" SHELL:PLATE G/F WITH WHITE ABS OUT COVER	
1	CABLE	UL20276 DISPLAYPORT CABLE OD:5.0 IMPEDANCE:100 Ohm	
NO.	PART	SPEC	REMAKE
INNERMOLD		TOLERANCE UNLESS SPECIFIED	
		± 0.1	
		± 0.38	
		ANGLE	
		SCALE	NON
		UNIT	mm
OVERMOLD		DRAWN: LIAO 2011/11/15	NAME
		DESIGNER: Haitao	Mini DisplayPort M T M cable
		CHECKED: Robert	
		APPROVED: Dived	
		DRAWING NO. 18-9420xxxx	SHEET 1/1
			REV 0.1