
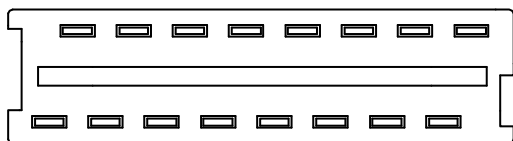



### SPECIFICATIONS

Material  
 Insulator: PBT, glass reinforced, rated UL 94V-0  
 Contact: Phosphor Bronze  
 Electrical  
 Current Rating: 1 Amp  
 Contact Resistance: 30m OHMmax.  
 Insulation RESISTANCE: 3000 MOHM min.  
 Dielectric Withstanding voltage: 500v ac FOR 1 minute  
 Operating Temperature: -40C to + 105C

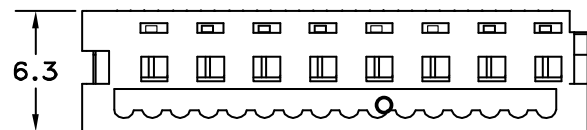

POSITION	A	B
4	7.59	3.81
6	10.13	6.35
8	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.39	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
26	35.53	31.75

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
 Tel: +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. PF-SF-XX

DWG NO. PF-SF-XX

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION 

TOLERANCES ARE

.X ±0.3  
 .XX ±0.2  
 .XXX ±0.1  
 AWG

DESCRIPTION:

**DONCO CONNECTOR (FEMALE ON WIRE TYPE) 2.54mm**

AREA

REVISIONS

HK

DATE