

**NOTES:**

**1.MATERIALS:**

INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC  
 LCP UL94V-0.  
 CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT,  
 TIN PLATED ON TAIL 100u", OVER NICKEL PLATED 50u".  
 SHELL: STEEL, NICKEL PLATED.  
 BOARDLOCK: BRASS, TIN PLATED.  
 RIVET: BRASS, NICKEL PLATED.

**2.ELECTRICAL:**





INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM  
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
 VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM  
 CURRENT RATING: 3.0 AMPS PER CIRCUIT  
 CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM

**3.MECHANICAL PERFORMANCE:**

MATING FORCES: 4.5kgf MAXIMUM  
 UNMATING FORCES: 1kgf MINIMUM, 4kgf MAXIMUM  
 DURABILITY: 100 CYCLES MINIMUM

**4.ENVIRONMENTAL:**

TEMPERATURE RANGE: -20°C TO +85°C

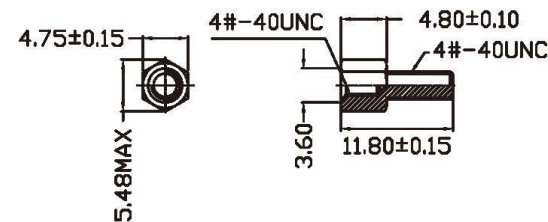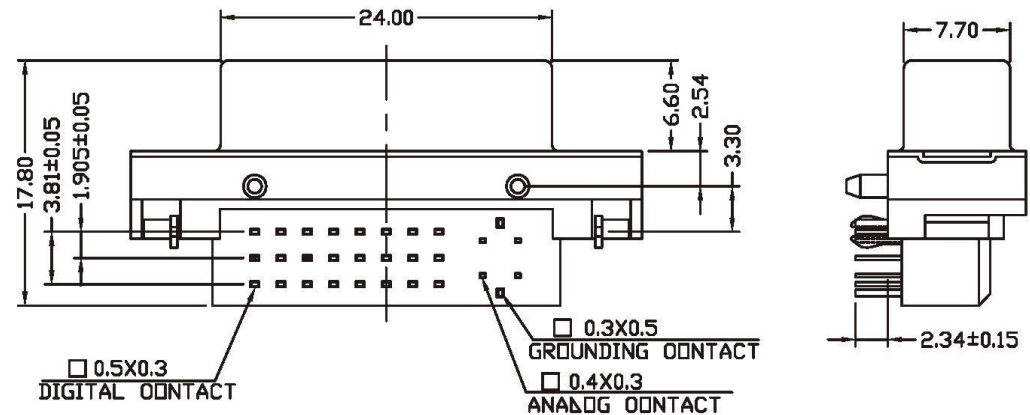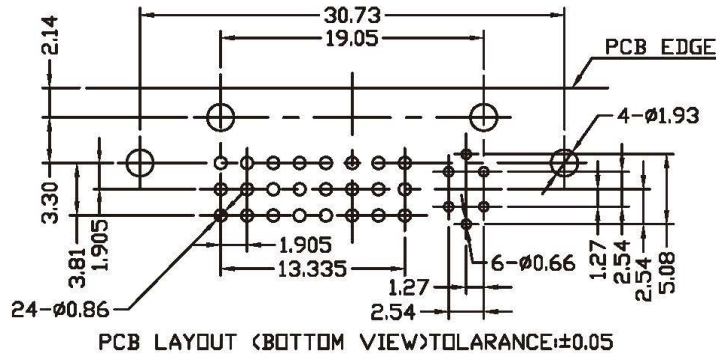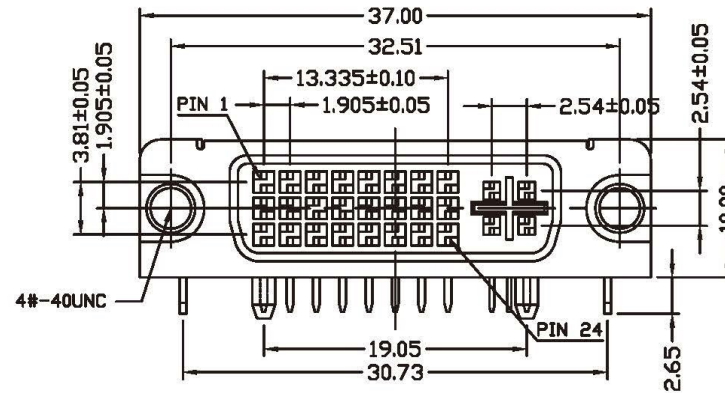

**All Connectors**

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
 70794 Filderstadt - Germany Kettenerstr. 25

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1 : 1

DATE


SIZE A4 PROJECTION

TOLERANCES ARE

X ±  
 X ± 0.38  
 XX ± 0.25  
 XXX ±  
 ANG ±



**ORDER INFORMATION**

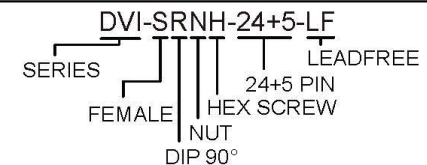

DESCRIPTION: DVI 24+5Pin 90度母座無後鐵殼(BC)