



NOTE:

- 1.MATERIAL
HOUSING: LCP 30%GF THERMOPLASTIC UL94V-0 BLACK
CONTACT: BRASS
SHELL: BRASS
- 2.PLATING:
CONTACT AREA: 15u" GOLD PLATED OVER Ni
SOLDER TAIL: 100U" MIN TIN PLATED OVER Ni
- 3.ELECTRICAL
CONTACT RESISTANCE: 30 MILLIOHMS
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
CURRENT RATING: 1.5A
INSULATION RESISTANCE: 1000M OHM MIN
- 4.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C TO +85°C

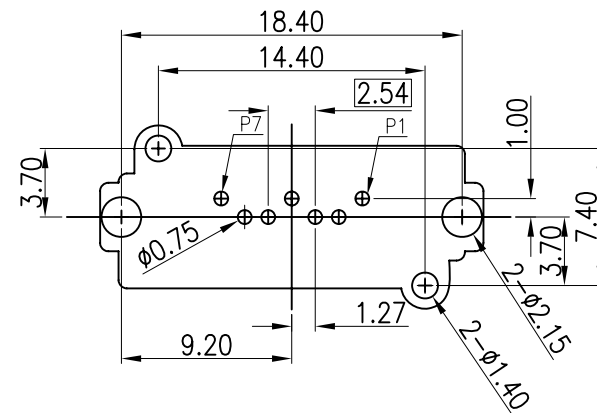

RECOMMENDED P.C.B LAYOUT

Product Number	Description	
215A-SEB0	E SATA 7P Male Straight 180° DIP Type , LCP Black With Shell, Contact Plating 15u"	
	UNLESS OTHERWISE SPECIFIED TOLERANCE	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
	ANG. ±5° 0. ±0.3 .0 ±0.25 .00 ±0.20	
	SCALE: AS SHOWN	UNIT: mm
	DRAWN Willis	2010/09/08
	CHECKED Angel	2010/09/08
	APPROVED Ken	2010/09/08
REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		

DRAWN NAME: E SATA 7P MALE STRAIGHT 180° DIP TYPE WITH SHELL
 PRODUCT NO. 215A-SEB0
 FILE NAME: 215A-SEB0_B_1