


Product_3D_dwg

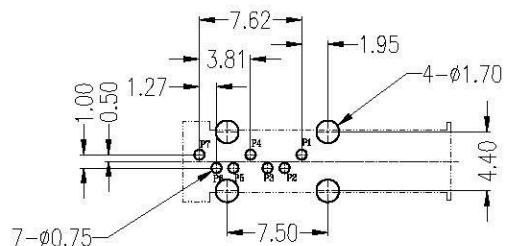

PCB Layout t=1.60mm
Top View

NOTES:

***Material**

Housing: Nylon46 or LCP,UL 94-0 Rated;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin Plating on Solder Tail.

***Mechanical**

Insertion Force: 2550g max;
Withdrawal Force: 710g min;
Durability: 2500 cycles.

***Electrical Specification**

Operation Voltage: 100 VAC max.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30m OHM MAX
Insulation Resistance: 1000M OHM MIN
Dielectric Withstanding Voltage:500VAC.

***Environmental**

Operating Temperature : -55°c to +125°c.

ESATA-PU-07-LF
LEADFREE
RoHS Compliant

All Connectors

www.allconnectors.de
Tel.: 0049 211 7069001
70729 Hildersbach - Germany

info@allconnectors.de
Fax: 0049 211 7069004
Kettnerstr. 25

PART NO. ESATA-PU-07

DWG NO. ESATA-PU-07

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

eSATA Upright DIP
Type Male

AREA

REVISIONS

HK

DATE