


REV.	ECN NO.	ADDP.
1	DC-04013	Joseph Chou 8/6/2004

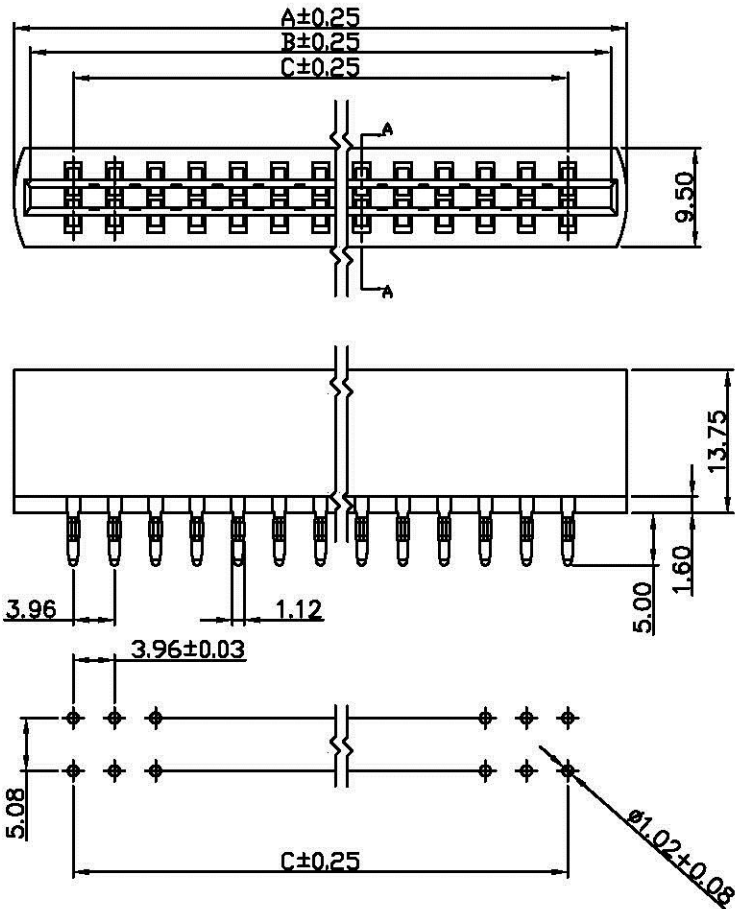

FEATURE:

INSULATOR

Glass-Filled PBT is 94V-0 rated, Color : BLACK

CONTACT

Phosphor Bronze selective gold plating over nickel

SPECIFICATION:

Current Rating : 3 Amperes

Contact Resistance : 10 Miniohms Maximum.

Operation Temperature : -55°C to +105°C

Voltage Rating : 1800 VAC 1 Minute

Insulation Resistance : 5000 Megaohms Minimum

Daughter Board Insertion Force : 0.45 kgs Maximum per pair

Daughter Board Withdrawal Force : 0.028 kgs Minimum per pair

Contact tail Insertion into Hole : 40 lbs Maximum

Contact tail Retention In Hole : 10 lbs Minimum

NOTE:

ORDERING INFORMATION

SERIES NO. CONTACTS NO.

4000A — XX

Recommended PCB Hole

Drilled Hole : 1.15±0.03mm

Copper Plate 0.025mm Minimum thickness followed

be Tin/Lead plate to provide finished hole 1.02±0.08mm diameter

CONTACTS NO.	DIM A	DIM B	DIM C
28/56	118.30	115.20	106.92
30/60	126.22	123.12	114.84
36/72	149.98	146.88	138.60
40/80	165.82	162.72	154.44
43/86	177.70	174.60	166.32
50/100	205.42	202.32	194.04

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

X± 0.10	X± 0.38	XX± 0.15	NAME	EDGE CARD CONN.
X°	X°	XX°	PART NO.	4000A SERIES
UNITS: mm	DATE: 8/1/2004		TITLE:	PITCH 3.96mm EDGE CARD CONN. PRESS FIT TYPE
MAT'L:			APPD:	Joseph Chou
CONTACT:			APWD:	Ching-Yi Yu
PHOSPHOR BRONZE			DR:	Zi.Hsiang.Chen
HOUSING:			DWG NO.	010-0000-54A
PBT UL94V-0			SCALE	N/A
			SHEET	1/1
			REV	1