


REV.	ECN NO.	ADDP.
I	DC-04018	Joseph Chou 8/6/2004

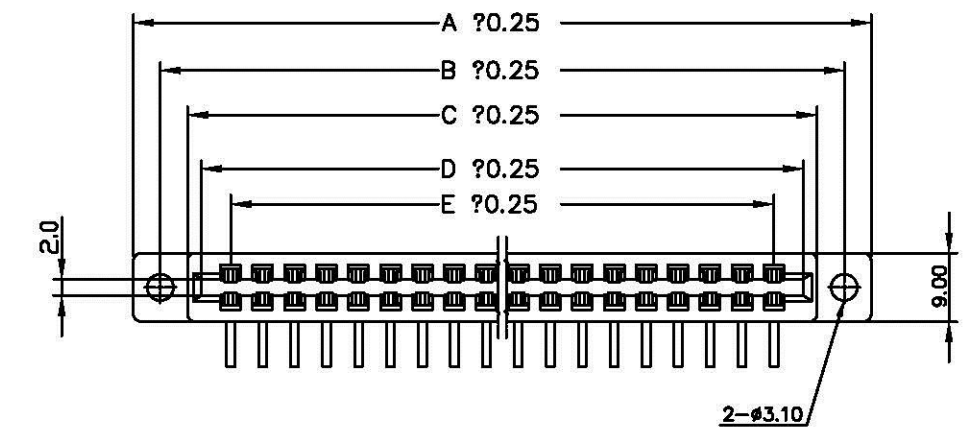




FEATURE:
 INSULATOR: PBT+30 % Glass Fiber (UL94V-0)
 Contact: BRASS
 Plating: Gold Flash Over All

SPECIFICATION:
 Current Rating: 3 Amp
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 5000 Megohms Min At 500 VDC.
 Voltage: 500V For One Minute

ENVIRONMENTAL:
 TEMPERATURE RANGE: -40°C~+105°C

NOTE: ORDER INFORMATION

Series no Contacts no
 4000R — XX

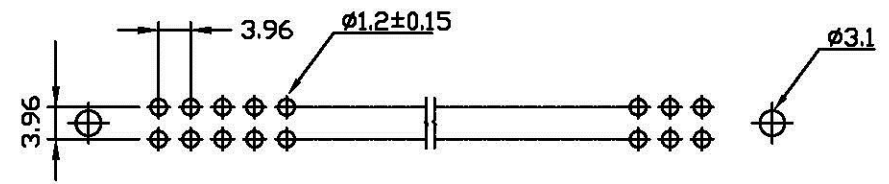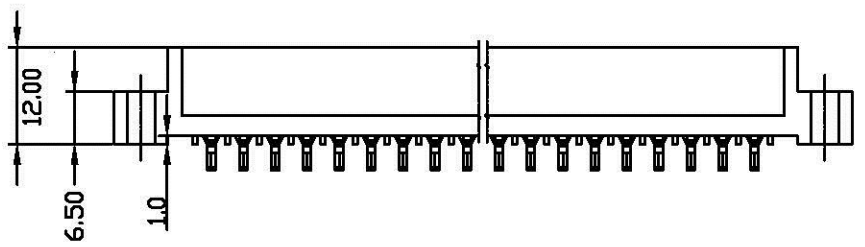

CONTACTS NO	DIN A	DIN B	DIN C	DIN D	DIN E
5/10	41.24	34.94	27.40	24.06	15.84
6/12	45.20	38.90	31.36	28.02	19.80
8/16	53.12	46.82	39.28	35.94	27.72
10/20	61.04	54.74	47.20	43.86	35.64
12/24	68.96	62.66	55.12	51.78	43.56
13/26	72.92	66.62	59.08	55.74	47.52
14/28	76.88	70.58	63.04	59.70	51.48
15/30	80.84	74.54	67.00	63.66	55.44
16/32	84.80	78.50	70.96	67.62	59.40
18/36	92.72	86.42	78.88	75.54	67.32
20/40	100.64	94.34	86.80	83.46	75.24

CONTACTS NO	DIN A	DIN B	DIN C	DIN D	DIN E
22/44	108.56	102.26	94.72	91.38	83.16
23/46	112.52	106.22	98.68	95.34	87.12
24/48	116.44	110.18	102.26	99.30	91.08
25/50	120.44	114.14	106.60	103.26	95.04
28/56	132.32	126.02	118.48	115.14	106.92
30/60	140.24	133.94	126.40	123.06	114.84
31/62	144.20	137.90	130.36	127.02	118.80
32/64	148.16	141.86	134.32	130.98	122.76
35/70	160.04	153.74	146.20	142.86	134.64
36/72	164.00	157.70	150.16	146.82	138.60
43/86	191.48	185.49	177.88	174.54	166.32

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25

X± XXX	X± 0.38	XX± 0.25	NAME EDGE CARD CONN Right Angle	TITLE EDGE CONNECTOR 3.96MM PITCH WITH MOUNTING EARS
X*	X*	XX*	PART NO. 4000R SERIES	DWG NO. 010-0000-54R
UNITS: mm	DATE: 8/1/2004	APPR: Joseph Chou	DR: Ching-Yi-Yu	SCALE/SHEET/REV N/A / 1/1 / I
MAT'L: CONTACT : BRASS	HOUSING: PBT UL94V-0	DR: Zi.Hsiang.Chen		