


REV.	ECN NO.	ADDP.
H	0514101	Joseph Chou 8/1/2004

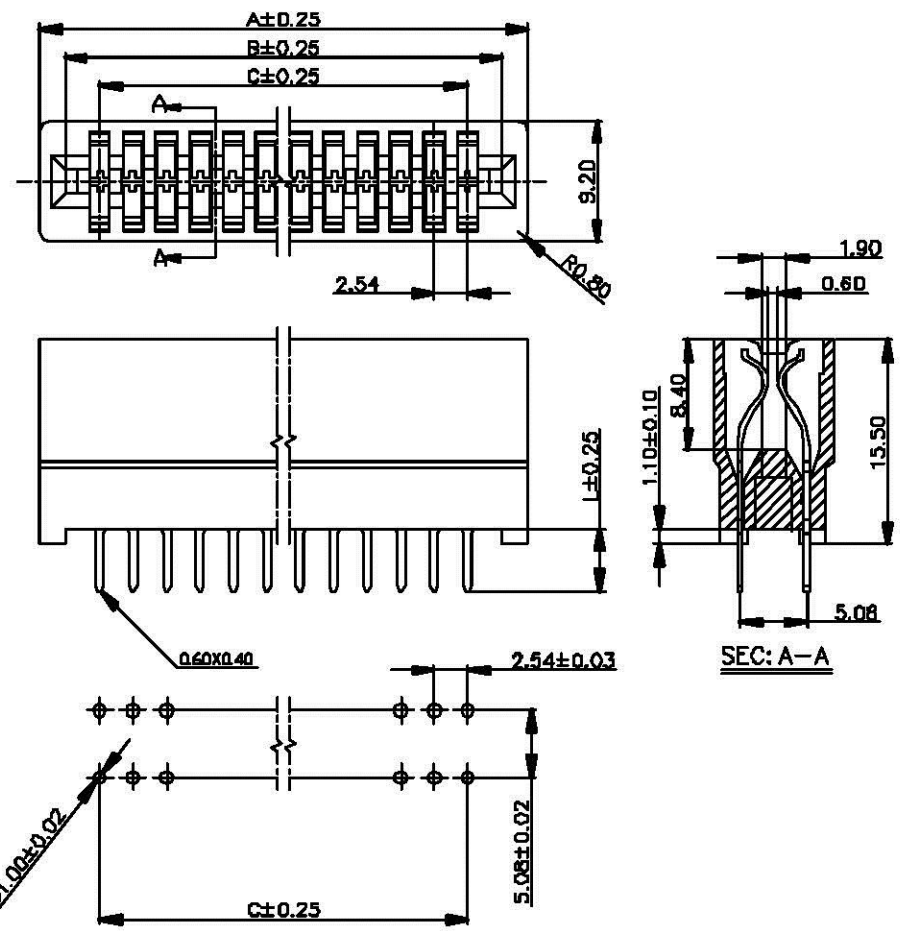

**FEATURE:**  
 INSULATOR  
 Glass-Filled P.B.T. is 94V-0 rated  
 CONTACT  
 Phosphor Bronze selective gold plating over nickel

**SPECIFICATION:**  
 Current Rating : 3 amperes  
 Contact Resistance : 20 miniohms max.  
 Operation Temperature : -55°C to +105°C  
 Voltage Rating : 800 VAC 1 minute  
 Insulation Resistance : 5000 megohms min.  
 Insertion Force : 412 grams max. per pair  
 Withdrawal Force : 32 grams min. per pair

**NOTE:**  
 ORDERING INFORMATION  
 ex  
 SERIES NO. CONTACTS NO. TAIL LENGTH



**Allconnectors**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany  
 info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25

CONTACTS NO	DIM A	DIM B	DIM C	CONTACTS NO	DIM A	DIM B	DIM C	CONTACTS NO	DIM A	DIM B	DIM C
2/4	11.68	7.82	2.54	14/28	42.16	38.31	33.02	32/64	87.88	84.02	78.74
3/6	14.22	10.36	5.08	15/30	44.70	41.84	35.56	35/71	95.50	91.64	86.36
4/8	16.76	12.90	7.62	16/32	47.24	43.38	38.11	36/72	98.04	94.18	88.90
5/10	19.31	15.44	10.16	17/34	49.78	45.92	40.64	40/81	108.20	104.34	99.06
6/12	21.84	17.98	12.70	18/36	52.32	48.46	43.18	43/86	115.82	111.96	106.68
7/14	24.38	20.52	15.24	19/38	54.86	51.00	45.72	49/98	138.68	134.82	129.54
8/16	26.92	23.06	17.78	21/41	57.40	53.54	48.26	51/100	133.61	129.74	124.46
9/18	29.46	25.60	20.32	22/44	62.48	58.62	53.34	54/108	143.76	139.90	134.62
10/20	32.00	28.14	22.86	24/48	67.56	63.70	58.42	61/120	159.01	155.14	149.86
11/22	34.54	30.68	25.41	25/50	70.10	66.24	60.96				
12/24	37.08	33.22	27.94	31/61	82.81	78.94	73.66				
13/26	39.62	35.76	30.48	31/62	85.34	81.48	76.20				

TAIL LENGTH	L
A	4.70mm
C	6.10mm
F	14.10mm
H	21.80mm

X± 1.10	X± 1.38	XX± 0.25	NAME INTENDED USE	
X*	X*	XX*	EDGE CARD CONN.	
UNITS: mm	DATE: 8/1/2004	PART NO. INTENDED USE	1101 SERIES	TITLE: EDGE CONNECTOR 2.54mm PITCH WITHOUT MOUNTING EARS
MATL:	CONTACT: PHOSPHOR BRONZE	HOUSING: P.B.T. UL94V-0	ADDP: Joseph Chou	DWG NO. 010-0110-510
			APPD: Ching-Yi Yu	SCALE: N/A
			DR: Zi.Hsiang.Chen	SHEET: 1/1
				REV: H