


REV.	ECN NO.	ADDP.
H	1504007	Joseph Chou 8/1/2004

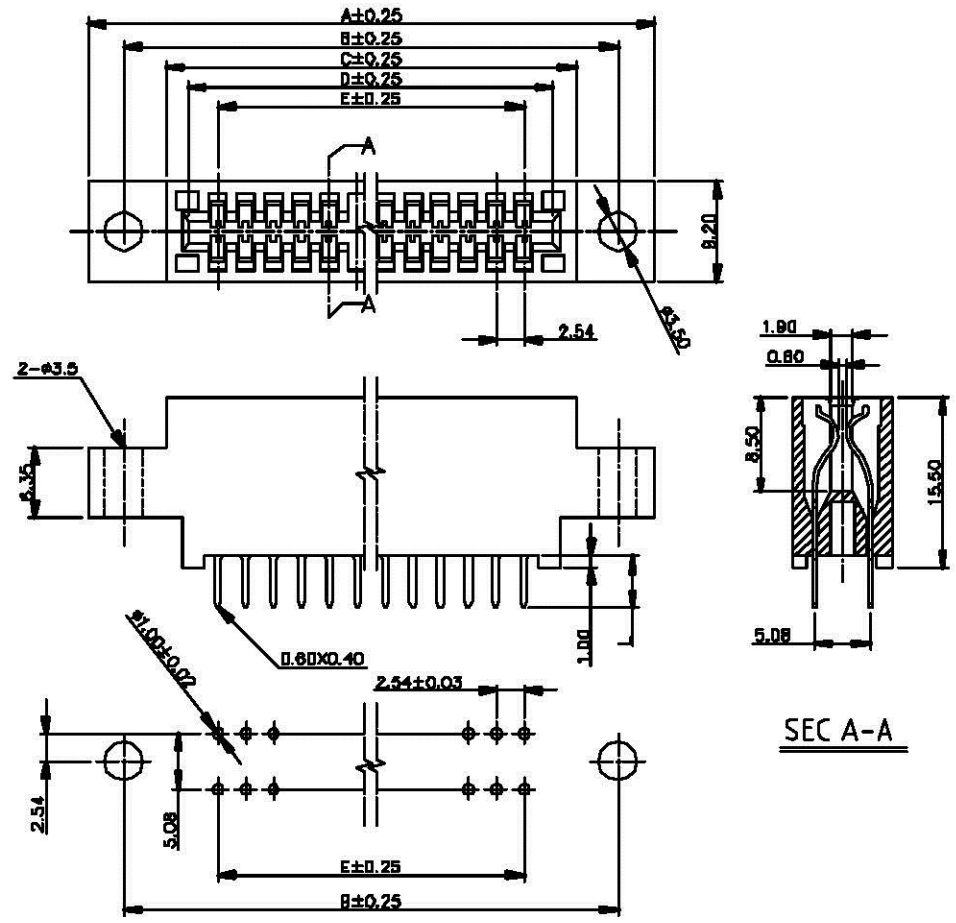

SEC A-A

FEATURE:

INSULATOR
Glass-Filled P.B.T. is 94V-0 rated
CONTACT
Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:

Current Rating : 3 amperes
Contact Resistance : 20 miniohms max.
Operation Temperature : -55°C to +105°C
Voltage Rating : 800 VAC 1 minute
Insulation Resistance : 5000 megaohms min.
Insertion Force : 412 grams max. per pair
Withdrawal Force : 32 grams min. per pair

NDTE:

ORDERING INFORMATION

ex
SERIES NO. CONTACTS NO. TAIL LENGTH
2000 XX L

CONTACT NO	DIM A	DIM B	DIM C	DIM D	DIM E
12/24	51.69	45.09	37.38	33.22	27.94
22/44	77.09	70.49	62.78	58.62	53.34
24/48	82.17	75.57	67.86	63.70	58.42
25/50	84.71	78.11	70.40	66.24	61.96
28/56	92.33	85.73	78.02	73.86	68.58
30/60	97.41	90.81	83.10	78.94	73.66
35/70	110.11	103.51	95.81	91.64	86.36
36/72	112.65	106.05	98.34	94.18	88.91
43/86	131.43	123.83	116.12	111.96	106.68
44/88	133.17	126.57	118.66	114.51	119.22
50/100	148.21	141.61	133.90	129.74	124.46

TAIL LENGTH	L
A	4.70mm
C	6.10mm
F	14.10mm
H	21.80mm

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Fildefstadt - Germany Kettmerstr. 25

X± 1.10	X± 1.38	XX± 0.25	NAME INTENDED USE	EDGE CARD CONN.
X*	X*	XX*	PART NO. INTENDED USE	
UNITS: mm	DATE: 8/1/2004		2001 SERIES	TITLE: EDGE CONNECTOR 254mm PITCH WITH MID-HIGH MOUNTING EARS
MATERIAL:			APDP: Joseph Chou	DWG NO. 110-1011-521
CONTACT: PHOSPHOR BRONZE			APRD: Ching-Yi Yu	SCALE: N/A
HOUSING: P.B.T. UL94V-0			DR: Zi.Hsiang.Chen	SHEET: 1/1
				REV: H