

REV.	ECN NO.	ADDP.
H	0504119	Joseph Chou 8/1/2004

FEATURE:

INSULATOR
 Glass-Filled P.B.T. is 94V-0 rated
 CONTACT
 Phosphor Bronze selective gold plating
 over nickel

SPECIFICATION:

Current Rating : 3 amperes
 Contact Resistance : 20 miniohms max.
 Operation Temperature : -55°c to +105°c
 Voltage Rating : 800 VAC 1 minute
 Insulation Resistance : 5000 megaohms min.
 Insertion Force : 412 grams max. per pair
 Withdrawal Force : 32 grams min. per pair

NOTE:

ORDERING INFORMATION


ex

SERIES NO. CONTACTS NO. TAIL LENGTH. ROW TO ROW DIN.

2300 — 72 — L — S

TAIL LENGTH	L	ROW TO ROW	S
A	3.50mm	A	5.08mm
B	6.00mm	B	3.81mm
C	10.80mm	C	3.00mm
		D	2.54mm

X± 0.10	X± 0.38	XX± 0.25	NAME INTENDED USE I	EDGE CARD CONN.
X*	X*	XX*		
UNITS: mm	DATE: 8/1/2004	PART NO. INTENDED USE I	TITLE:	
MATL:		2301 SERIES	EDGE CONNECTOR 2.54mm PITCH WITH LOW MOUNTING EARS E/A TYPE	
CONTACT:		APPR: Joseph Chou	DWG NO.	110-1001-523
HOUSING:		APRD: Ching-Yi Yu	SCALE	N/A
P.B.T. UL94V-1		DR: Zi.Hsiang.Chen	SHEET	1 / 1
			REV	H

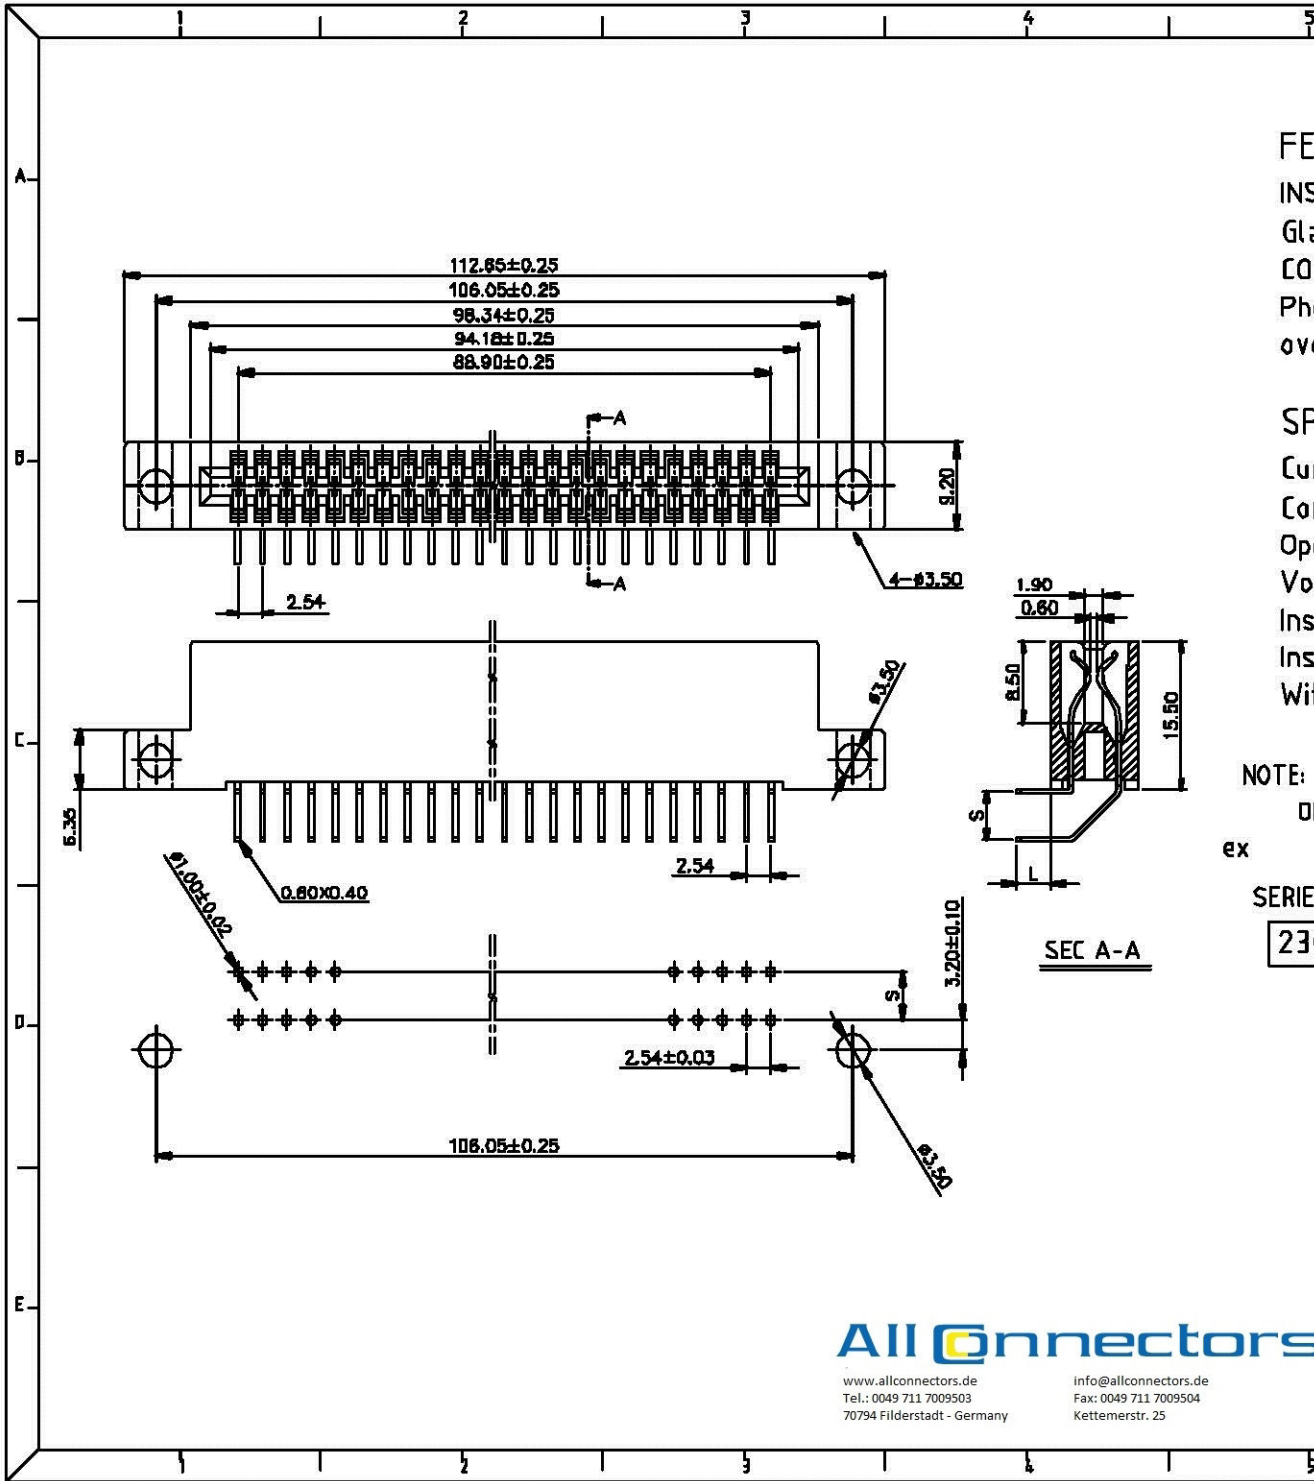

All Connectors
 www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany

Info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25