


REV.	ECN NO.	ADDP.
H	0514011	Joseph Chou 8/17/2006

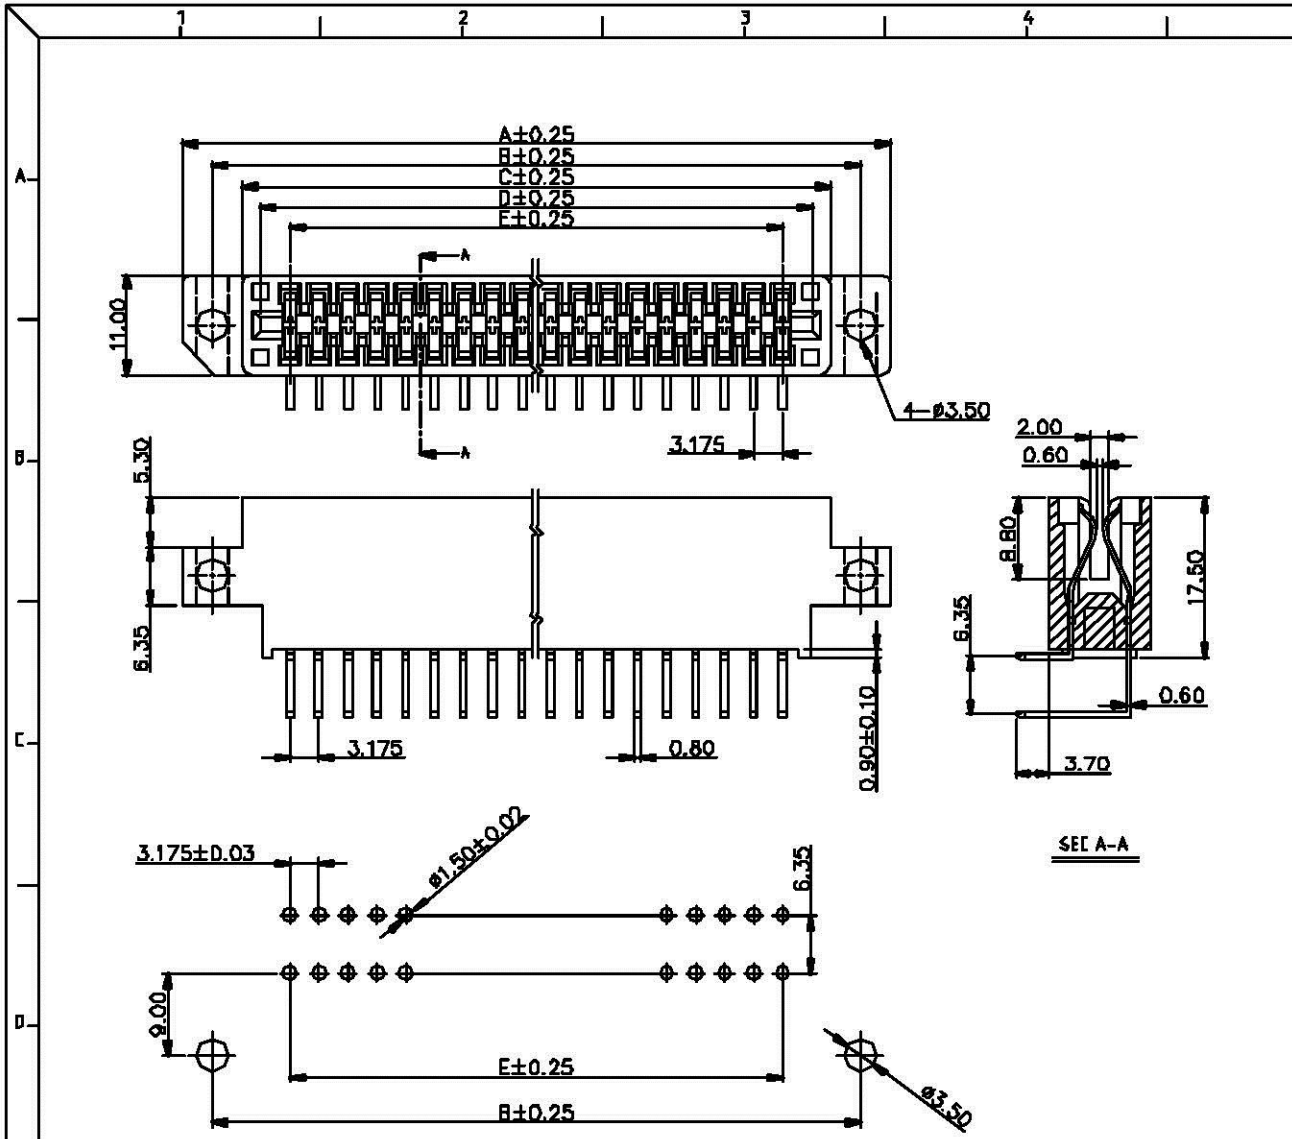

FEATURE:

INSULATOR
Glass-Filled P.B.T. is 94V-0 rated
CONTACT
Phosphor Bronze selective gold plating
over nickel

SPECIFICATION:

Current Rating : 3 amperes
Contact Resistance : 20 miniohms max.
Operation Temperature : -55°C to +105°C
Voltage Rating : 800 VAC 1 minute
Insulation Resistance : 5000 megohms min.
Insertion Force : 412 grams max. per pair
Withdrawal Force : 32 grams min. per pair

NOTE:

ORDERING INFORMATION

ex
SERIES NO. CONTACTS NO.

3200 XX

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

CONTACTS NO.	DIM A	DIM B	DIM C	DIM D	DIM E
15/30	68.08	61.47	54.52	51.81	44.45
18/36	77.61	71.99	64.04	60.33	53.97
20/40	83.95	77.34	70.39	66.68	61.32
22/44	91.30	83.69	76.74	73.03	66.67
28/56	119.35	102.74	95.79	92.18	85.72
30/60	115.70	109.19	112.14	98.43	92.07
36/72	134.75	120.14	121.19	117.48	111.12
40/80	147.45	141.84	133.89	131.18	123.82
43/86	156.97	151.36	143.41	139.71	133.35
51/110	179.21	172.59	165.64	161.93	155.57

X± 1.10	X± 0.30	XX± 1.25	NAME INTENDED USE	
X*	X*	XX*	EDGE CARD CONN.	
UNITS: mm	DATE: 8/1/2016	PART NO. INTENDED USE	TITLE	
MATL:	CONTACT: PHOSPHOR BRONZE	3201 SERIES	EDGE CONNECTOR 3.175mm PITCH WITH MID-HIGH MOUNTING EARS R/A TYPE	
	HOUSING: P.B.T. UL94V-0	APPR Joseph Chou	DWG NO. 110-1010-532	
		APPR Ching-Yi Yu	SCALE SHEET REV	
		DR: Zi.Hsiang.Chen	N/A 1/1 H	