


REV.	ECN NO.	ADDP.
H	0504112	Joseph Chou 8/1/2004

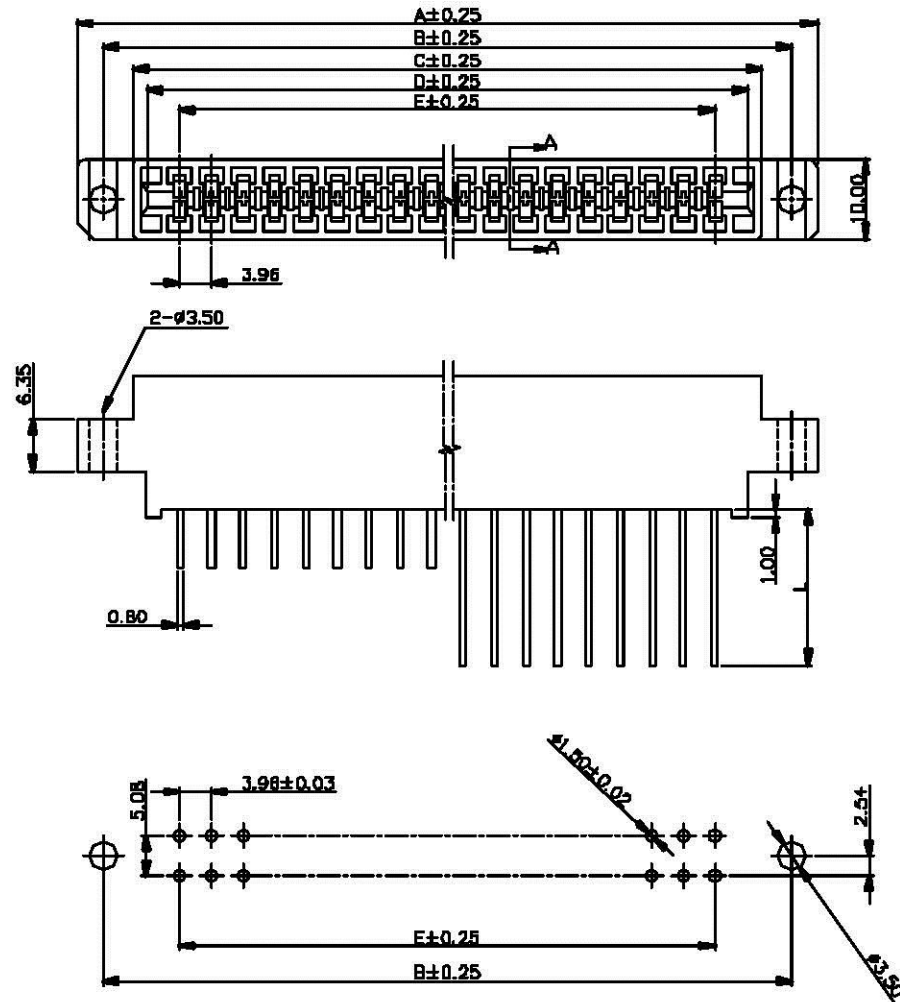


FEATURE:
 INSULATOR
 Glass-Filled P.B.T. is 94V-0 rated
 CONTACT
 Phosphor Bronze selective gold plating
 over nickel

SPECIFICATION:
 Current Rating : 3 amperes
 Contact Resistance : 20 miniohms max.
 Operation Temperature : -55°C to +105°C
 Voltage Rating : 800 VAC 1 minute
 Insulation Resistance : 5000 megaohms min.
 Insertion Force : 412 grams max. per pair
 Withdrawal Force : 32 grams min. per pair

NOTE:
 ORDERING INFORMATION

ex
 SERIES NO. CONTACTS NO. TAIL LENGTH
 4000 XX L

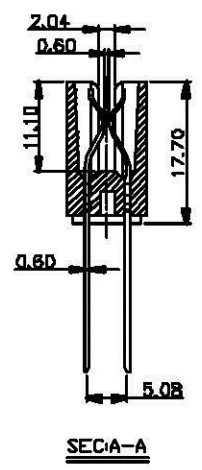

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany
 info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25

TAIL LENGTH	L
A	7.40mm
B	19.60mm

CONTACTS NO.	DIM A	DIM B	DIM C	DIM D	DIM E
18/36	93.02	86.62	79.02	75.72	67.32
20/40	101.94	94.54	86.94	83.64	75.24
22/44	108.86	102.46	94.86	91.56	83.16
28/56	132.62	126.22	118.62	115.32	106.92
30/60	140.54	134.14	126.54	123.24	114.84
43/86	192.02	185.62	178.12	174.72	166.32
50/100	219.74	213.34	215.74	202.44	194.04

X± 1.10	X± 1.38	XX± 0.25	NAME INTENDED USED
X*	X*	XX*	EDGE CARD CONN.
UNITS: mm	DATE: 8/1/2004	PART NO. INTENDED USED	TITLE:
MATL:	CONTACT: PHOSPHOR BRONZE	4000 SERIES	EDGE CONNECTOR 3.96mm PITCH WITH MID-HIGH MOUNTING EARS
HOUSING: P.B.T. UL 94 V-0	ADDP: Joseph Chou	APPD: Ching-Yi Yu	DWG NO. 110-1010-54-1
	DR: Zi.Hsiang.Chen	SCALE: N/A	SHEET: 1/1
		REV: H	